
City Sanitation Plan BARIPADA




June 2012

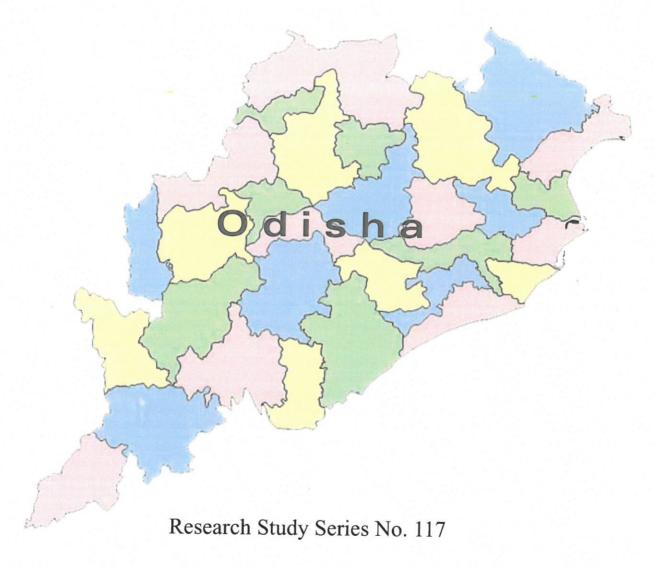

National Institute of Urban Affairs

New Delhi, India

City Sanitation Plan BARIPADA



Research Study Series Number 117

June 2012



National Institute of Urban Affairs New Delhi

PREFACE

The overall goal of the National Urban Sanitation Policy (NSUP) is to transform Urban India into community-driven, totally sanitized, healthy and livable cities and towns. Each state needs to formulate its own sanitation strategy and their respective cities should prepare sanitation plan in conformity with the NUSP.

In this context, the Government of Odisha (GoO) selected eight cities/towns to prepare City Sanitation Plans (CSPs) viz. Bhubaneshwar, Cuttack, Berhampur, Sambalpur, Rourkela, Puri, Balasore, Baripada. These cities/towns were selected on the basis of (i) geographical representation; (ii) emerging demand and interest of ULB to take-up initiative; and (iii) poor sanitation conditions that require urgent attention. GoO has also prepared a State Urban Sanitation Strategy in 2011, which served as guidelines for the selected cities/towns to prepare CSP.

GoO has identified National Institute of Urban Affairs (NIUA), New Delhi, as a technical coordinator to carry out the work. Subsequently, NIUA has undertaken the work in association with All India Institute of Local Self Government – Planning and Resource for Urban Development Affairs (AIILSG-PRUDA) and OP& HS (infra).

Out of the eight CSPs, five have been prepared by AIILSG-PRUDA viz. Bhubaneshwar, Puri, Cuttack, Balasore and Baripada and three by OP&HS (infra) viz. Sambalpur, Raurkela and Berhampur. NIUA is thankful to the above agencies for carrying out the work. NIUA would like to thank officials of Department of Urban Development, GoO, selected cities/towns and Ministry of Urban Development, Government of India for their continued guidance and support. Special thanks are due to Dr. M.P.Mathur, Mr. Ajay Nigam and Mr. Naveen Mathur who have overseen the in-house work, visited the cities, attended meetings and provided their valuable comments.

Chetan Vaidya

Crete Vardya

Director, NIUA

June 2012

Table of Contents

List of tables	i
Table of Figures	
Table of Maps	ا
Executive Summary	I
ARREVIATIONS	
ABBREVIATIONS	i
Chapter 1: Introduction	
1.1 Urban Sanitation Scenario in India	1
1.2 Government of India Initiatives	1
1.3 National Urban Sanitation Policy	2
1.4 Overview of Sanitation Initiatives in Odisha	3
1.5 Objective of Baripada City Sanitation Plan (CSP)	6
Chapter 2: Profile of Baripada City	7
2.1 Location	7
2.2 Climate	8
2.3 Population	8
2.4 Slums in the city	9
2.5 Health, Educational and Institutional establishments	9
2.6 Institutional Set-up of Baripada Municipality	10
2.7 Staff Position of Baripada Municipality	10
Chapter 3: Approach & Methodology for Preparation of City Sanitation Plan	12
3.1 Approach and Methodology Adopted	12
3.1.1 Planning Workshop	13
3.2 Baseline Data Generation and Creating Database/GIS	16
3.3 Preparation of City Sanitation Plan 3.4 Preparation of Implementation Plan	16
Chapter 4: Situation Analysis of Canidation English	17
Chapter 4: Situation Analysis of Sanitation Facilities and Services	18
4.1 Water Supply Status	19
4.2 Household and Public Sanitation Facilities 4.2.1 Access to Sanitation at Household level	20
4.2.2 Disposal of Waste Water from toilets	21
4.2.3 Areas where open defecation is practiced	21
4.2.4 Population resorting to open Defecation	22
4.2.4.1 Gap Analysis – Household sanitation	22
4.2.4.2 Key Issues in Household level sanitation	22
4.2.4.3 Septage Management	23
4.3 Public Sanitation facilities	23
4.3.1 Gap Analysis – Public Sanitation Facilities	25
4.4.1 Sewerage System	25
4.4.1.1 Generation of Wastewater	25
4.4.2 Storm water Drainage System	25
4.4.3 Existing status of Sullage Management	26
4.4.5.1 Gap Analysis - Drainage System	26
4.4.4 Rey Issues	26
aste iriana gement	27
4.5.1 SWM – Gaps	27
Chapter 5: Technology Options	29
5.1 Options for Latrines/toilets (Onsite disposal)	29
5.1.1 Pit Latrine: 5.1.2 Eco Sanitation Latrines	29
3.1.3 Flush Tollets with Septic Tanks	29
5.1.4 Flush Toilets with Septic Tanks	29
5.1.3 Flush Toilets with Septic Tanks 5.1.4 Flush Toilets connected to the proposed sewerage system 5.1.5 Community Toilets connected with septic tanks	29

5.2 Options for conveyance system	
5.2.1 Small bore sewerage and Shallow Sewer system	
5.2.2 Conventional Underground Sewerage System	3
5.3 Treatment System (Off Site Sanitation)	
5.3.1 Waste stabilization ponds	
5.3.3 Decentralised Wastewater Treatment System	
5.3.4 Anaerobic baffled reactor (ABR)	
5.4 Collection, Treatment and Disposal of Liquid Waste (Off site treatment)	
5.4.1 Parameters for selection of suitable options.	
5.5 Proposed options for Solid Waste Management	30
5.5.1 Processing of Biodegradable Waste	
Chapter 6 : Household Survey: Needs Assessment	
6.1 Sanitation Needs	
6.1.1 Household and Community Sanitation	
6.1.2 Sullage and Sewage Management	
6.1.3 Solid Waste Management	
6.2 Willingness to Pay	46
Chapter 7: Proposed Sanitation Improvements in Baripada	47
7.1 Population Projections.	
7.2 Future Requirements for Individual Toilets	
7.3 Future Projections for Sewage Generation	
7.4 Septage Generation	
7.4.1 Future Projections for Septage Generation and Management	
7.5 Future Solid Waste Generation	
7.5.1 Collection and Transportation	54
7.5.2 Composting and Landfill	
7.5.3 Capacity and Land Requirement for Composting	
7.5.4 Design of Landfill	
7.6 Drainage	
7.7 Summary of the Proposed Sanitation Improvements	
7.8 Capital Cost Estimates	
Chapter 8 : Suggested Strategies and Phasing plan	
8.1 Immediate Action Plan	
8.2 Short Term Action Plan	
8.3 Mid Term Action Plan	
8.4 Long Term Action Plan	
Chapter 9: Awareness Strategy for Improving Sanitation Behaviour in Baripada	
9.1 Objectives of the Awareness Strategy	
9.2 Need for Specific Strategies	
9.3 Targeted Audience	
9.3.1 Population segments	
9.4 The Proposed Awareness Strategy	
9.5 Time Frame for Implementation of Awareness Strategy	
9.6 Monitoring and Regulation	
Chapter 10 : Implementation and O&M Strategy	
10.1 Awareness Strategies for Baripada	
10.1.1 Household and Public Sanitation	
10.1.2 Drainage and Sullage Disposal Arrangements	
10.1.3 Sewerage	
10.1.4 Solid Waste Management	
10.1.6 Composting and Land filling	
10.2 Sanitation Tariffs	
10.2.1 Expected O & M Expenditure	
10.3 Proposed Measures for Revenue Improvement	

Chapter 11: Implementation of CSP through Pilot demonstration and Immediate Action	on Plan
•••••••••••••••••••••••••••••••••••••••	70
11.1 Capacity building and awareness generation strategies	70
11.2 Demonstration of Pilot project for installation of wastewater management plant	71
11.3 Initiating solid waste management for particular area/ maholla/ ward	71
Chapter 12: Way forward	72
12.1 Financial Planning	72
Chapter 13 : ANNEXURES	72
ANNEXURE – 1: ASSESSMENT OF SANITATION FACILITIES IN INSTITUTIONS IN BARIPA ANNEXURE – 2 PREFERRED CHOICES OF TECHNOLOGIES AND WILLINGNESS TO PAY	DA 73

.

List of tables

Table 1: Baripada - Decadal Population	
From Rookman's Frant Rookman's Frant Rookman	Ir not doffmad
Table 3: Comparative analysis of suggested options	24
rable 4. Population Projections for Cuttack	17
Table 5: Projected requirements of individual household toilets	10
Table 6 Projected Requirements of Community Toilets	5.1
Table 7 Summary of Projected Individual / Community Toilets	
Table 8: Future projections for generation of wastewater	51
Table 9: Estimation of Generation of Septage and Management	53
Table 10: Estimation of future generations of solid waste.	53
Table 11: Future requirements for Collection and Transportation.	
Table 12: Details of Composting Site	55
Table 13: Design of Landfill site	56
Table 14: Future Requirements of Drainage Network	57
Table 15: Summary of Cost Estimates Table 16: Phasing Plan Table 17: Observations and expected leterations.	58
Table 16: Phasing Plan	61
rable 17. Observations and expected interventions	62
Table 18: Indicative O&M Cost estimation for Solid Waste Management	67
Table 19: Estimation of O&M Expenditure	69
Table of Figures	
Figure 1: Single Offset Pit latrine	29
Figure 2: Eco sanitation toilets	30
rigure 3: Flush tollets with septic tanks	20
Figure 4: Factors influencing the choices of appropriate technologies for waste management	ent38
Figure 5: Phasing Plan	60
Table of Maps	
Map 1: Ward Map of Baripada City	8
Map 2 Location of Public Toilets and Commercial Establishments Error! Bookmark	not defined

Executive Summary

Sanitation, being one of the basic amenities essential for healthy living, can be seen as safe management of human excreta, including its safe confinement treatment, disposal and associated hygiene-related practices. The Millennium Development Goals (MDGs) enjoin upon the signatory nations to extend access to improved sanitation to at least half the urban population by 2015, and 100% access by 2025. This implies extending coverage to households without improved sanitation, and providing proper sanitation facilities in public places to make cities open-defecation free.

There are 103 Urban Local Bodies in Odisha, which comprises of 3 Municipal Corporations, 37 Municipalities and 63 Notified Area Councils. Although Odisha has an overall projected urbanization rate of about 20 per cent in the year 2011, the actual growth in some pockets of the state in the recent years seems to be much faster than what is being generally perceived. Large conglomeration of people belonging to poorer strata of the society in Odisha cities has led to unplanned growth, immense pressure on the existing resource base, increasing number of slums and a large chunk of people without having access to provisions of basic amenities like potable drinking water, sanitation, housing and infrastructure support like roads, drainage and public transport. Provisions for these services not only require proper planning but also huge financial support by way of budgetary allocation.

With the existing trend of urbanization, the status of sanitation in the State of Odisha, especially in the slums and low-income settlements, is unsatisfactory. The facilities for safe disposal of solid and liquid waste are also not adequate. More than 1 million households in the state do not have access to toilet facilities, due to which they are forced to defecate in the open.

The State Government and the Urban Local Bodies (ULBs) have been implementing various programmes to address the issue of sanitation. However, in the absence of uniform policy guidelines, lack of a progress monitoring mechanism, multiplicity of agencies, overlapping jurisdictions and low awareness amongst the population, the results are not encouraging.

It is in this background that the Government of Orissa (GoO) has formulated the State Urban Sanitation Strategy (SUSP) on the lines of National Urban Sanitation Policy (NUSP) that was announced by, the Ministry of Urban Development, in December 2008. As a first step in implementing the SUSP, the GoO has undertaken 8 cities/towns for developing City Sanitation Plans (CSP) with the funding support from Government of India with National Institute of Urban Affairs as the central coordinating agency and Technical Advisor.

All India Institute of Local Self Government (AIILSG-PRUDA) has been appointed as the consultant for five cities viz. Bhubaneswar, Puri, Balasore, Baripada and Cuttack.

The City Sanitation Plan (CSP) for Baripada has been prepared through a participatory process, using community/citizen led total sanitation (CLTS) approach. PRUDA of AIILSG organised consultation workshops and other follow-up activities with community/citizen groups at the locality level in all wards in the city during the plan preparation stage.

The plan has been prepared in line with the requirements of the National Urban Sanitation Policy (NUSP) of Government of India. The time horizon of the plan is 5 to 10 years. Despite the best efforts of Baripada Municipality, the task of achieving sanitation goals is herculean.

As per preliminary figures of Census 2011, Baripada city has a population of 1,12,000 residing in 22400 households. It has registered 18% growth over past decade, as against the growth rate of 92% during the previous decade. As per Census 2001, slum population is 25% of the city's population. The slums are in woeful condition – unhygienic, densely cluttered and often sitting on natural drains. Nearly 85% of slum households have no access to toilets. The situation is aggravated further by a total absence of community toilets, lack of access to, or scarce or non-availability of municipal water supply. Child excreta are most often thrown into open. The CSP proposes to make Baripada city free of open defecation by year 2021 by combining construction of individual and community toilets.

The citizens of Baripada get 10.3 mld of drinking water at 92 lpcd against a demand of 15.32 mld at 135 lpcd. The supply network covers only 65% of the population. There are 317 hand pump tube wells. Thus, overall, the water is in short supply, and with poor coverage. In this background, infrastructure augmentation alone can remove the anomaly of poor distribution and its inequity of piped water supply. In coming future, the demand-supply gap will only increase progressively thereby also affecting the water treatment and storage capacities.

There is no underground sewerage system. As a result, majority of sewage flows through storm water open drains; the quality of water in Chipat river shows deterioration as a result of pollution. As per OWSSB norms, the capital cost of implementing sewerage project has been forecast at Rs. 3500/- per capita for a population projection in 2041.

The 145 km road length has 80% coverage of open drains. Storm water drains function as a conveyance channel for untreated sewage. They are choked by indiscriminate dumping of solid waste, building materials and related refuse. Drains are also significantly silted and collapsed.

One major aspect of sanitation that needs immediate attention of the authorities is the municipal solid waste and its management. The 30 TPD of waste generated in Baripada is dumped in small cement concrete bins or in open heaps and finally in an open dump. The city lacks a scientifically engineered landfill site, and a processing plant for converting waste into compost. The primary collection, secondary storage and transportation suffers from inadequate infrastructure, staff and more importantly, lack of civic sense and attitude of the citizens. Thus, the Baripada Municipality is not in compliance with the MSW Rules 2000. The CSP has projected MSW generation, composting site dimensions (the present side may be upgraded accordingly if need be) and landfill design with a 15-year perspective and has given indicative cost estimates.

The following Table summarises the sanitation requirements over a next 10 years:

vi Baripada City

Indicators	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021
Proposed Works							2017	2010	2019	2020	2021
Household Sanitation											
Individual Toilets	-	1345	1348	1351	1355	1358	1361	1156	1156	1156	1156
Community Toilet blocks (5 public toilets already available)	-	9	9	9	9	9	9	8	8	8	8
Drainage											
Rehabilitation of existing drains Kms		-	1.45	5.78	10.12	13.01	14.46				
Construction of new drainage network (Km)	-	-	14.46	57.83	101.20	130.11	144.57				
Sewerage		N. JAM	distance in								

As per OWSSB norms, new DPR for Baripada would approximately show total outlay @ Rs. 3500 per capita for a projected population in 2041.

Solid Waste Management									
Litter Bins Nos	-	-	-	-	289	-	-		
No. of Containers	-	57	58	59	60	61	62		
Mini Waste Collector (7 Mt Capacity)	-				5				
Compost Plant (25 Mt capacity)					1				
Water Tanker (3000 lit)					2				
Weigh Bridge (10Mt)					1				
Engineered Landfill (93075 Mt capacity)					1				

The total capital investments has been proposed at Rs. 79,905,7500 over next 10 years. This includes costs of new sewerage system of Rs. 64,22,64000 as projected by OWSSB (as per OWSSB norms, new DPR for Baripada would approximately show total outlay @ Rs. 3500 per capita for a projected population in 2041).

This should be viewed against the commitments already made by GoO in its published plans, policies and project financial outlay as given in the CSP.

Apart from capital investment, the CSP also mentions in detail, the recurring costs of O&M for all aspects of sanitation.

The overall strategy for achieving hundred percent access to sanitation is twofold - one, to trigger and mobilise communities to take local and collective action and; two, to ensure timely and quality implementation of related interventions under various schemes.

Municipal tariffs will need to be revised upwardly and fresh taxes such as sewerage and SWM imposed to increase the revenue. More importantly, tax collection efficiency with support from penal provisions, need to be improved drastically. A partial willingness to pay or willingness to contribute free labour among the urban poor for individual toilets is an opportunity to motivate the rest through pilot projects. The financial provisions in state government and central government schemes should be utilised fully each year – all this to fulfil the aspirations of the Baripada City Sanitation Plan.

Capacity building of all stakeholders will be crucial to achieving the goal of the CSP. As in the majority of ULBs across the country, in Baripada too, there are problems of lack of skills and multi tasking.

The City Sanitation Plan of Baripada is intended to be a flexible, dynamic and responsive document open to suitable changes as per emerging learning and needs. Changes are most likely to be in terms of data correction and updation and re-adjusting the planned activities in response to new learning.

Sustainability of sanitation outcome on the ground and sensitive environmental management will be the core concerns during the implementation phase. Awareness, education and sensitisation should lead to active citizen involvement that will be key to effective and successful CSP implementation on the ground.

viii Baripada City

ABBREVIATIONS

AIILSG All India Institute of Local Self Government

AVR Annual Ratable Value BOD Biological Oxygen Demand BOT Build, Operate and Transfer **BOOT** Build, Own, Operate and Transfer

BPL Below Poverty Line

CPHEEO Central Public Health and Environmental Engineering Organization

Cum Cubic Meter

DEWATS Decentralized Waste Water Treatment System

DPR Detailed Project Report **EWS** Economically Weaker Section **FGD** Focus Group Discussion GoI Government of India

Ha Hectare HHs Households

IEC Information, Education and Communication **ILCS** Integrated Low Cost Sanitation Scheme

IPC Interpersonal Communication

JNNURM Jawaharlal Nehru National Urban Renewal Mission

lpcd Litres Per Capita Per Day **MDG** Millennium Development Goal M&E Monitoring and Evaluation Mld Million Litres per day **MSW** Municipal Solid Waste

Mt/MT Metric Tonne

National Family Health Survey **NFHS** NGO Non Government Organization NSS National Sample Survey NUSP National Urban Sanitation Policy **0&M** Operation and Maintenance PHE

PRUDA Planning and Resources on Urban Development Affairs

Public Health Engineering

PVC Polyvinyl Chloride

RCC Reinforced Cement Concrete SWM Solid Waste Management

Sq.m Square Meter

UADD Urban Administration and Development Department, Govt. of Madhya Pradesh **UIDSSMT** Urban Infrastructure Development Schemes for Small and Medium Towns

ULB Urban Local Body

WSP Water and Sanitation Program

Chapter 1: Introduction

1.1 Urban Sanitation Scenario in India

Sanitation situation in Urban India is improving with several initiatives at the government and local level but still the statistics of Census 2001¹ indicate that there is a long way to go to achieve cleaner environments in Urban Areas in India. According to the Census of 2001, of 285 million urban populations in India, 26 per cent of the households do not have access to toilets and almost 50 million people (17.5%) defecate in the open.

1.2 Government of India Initiatives

Over the last three decades, Government of India has been taking several initiatives to accelerate and support in improving sanitation in urban India. Some of these² are -

The Integrated Low Cost Sanitation Scheme (ILCS) launched in 1980-81 for the replacement of service-latrines and the rehabilitation of workers engaged in the occupation of manual cleaning, achieved conversion of about 2.3 million service latrines (of the 5.4 million reported by NSS, 1989) were converted into sanitary ones by July 2007, and more than 50,000 scavenging workers rehabilitated. Over Tenth Plan (till June 2006), about 0.6 million individual household latrines were reported to have been constructed under the ILCS Scheme

Under the Valmiki Ambedkar Awas Yojana (VAMBAY, a successor to the National Slum Development Program) Scheme during the Tenth Plan (by Jan 2006) around 40,000 community toilet seats have reportedly been constructed.

Assistance is provided since December 2005 for creating infrastructure for sewerage and sanitation under JNNRUM and UIDSSMT. Approximately 20% and 14% of projects sanctioned under JNNRUM and UIDSSMT respectively are for sewerage systems. A separate scheme for creation of urban infrastructure including sanitation in satellite towns of the million plus cities³ is under way.

In 2008-09, Government of India revised Integrated Low Cost Sanitation Scheme (ILCS) to convert dry latrines or construct sanitary latrines for Economically Weaker Section (EWS) households in towns. Under the scheme, funds are available for the EWS Households up to Rs.10, 000 for single unit of two pit latrines. In hilly areas, the funding is raised upto Rs. 12,500.

Recently, the Ministry of Urban Development has formulated benchmarks for service delivery in the sanitation sector. The benchmarks will be used to appraise projects which are proposed for assistance under various schemes of the Ministry as well as externally aided projects. Besides, the extent to which various ULBs achieve the benchmark will be monitored.

¹ Provisional Census 2011 figures are not available for access to sanitation.

² Sustaining the Sanitation Revolution, India Country Paper-Sacosan III, November 2008

³ 35 such cities are there in India

1.3 National Urban Sanitation Policy

Government of India envisages providing access to water supply facilities and sewerage and on-site sanitation facilities to 100% of the urban population by the end of the 11th Five Year Plan (March 31 2012) a little before the MDG target in 2015.

The Government of India on 12th Nov 2008, announced the National Urban Sanitation Policy aiming at sanitizing all cities and towns of the country and making them open defecation free cities. The vision for Urban Sanitation in India is:

"All Indian cities and towns become totally sanitized, healthy and liveable and ensure and sustain good public health and environmental outcomes for all their citizens with a special focus on hygienic and affordable sanitation facilities for the urban poor and women".

Thus, the goals of NUSP can be summarized as follows:

Open Defecation Free Cities

- Promoting access to households with safe sanitation facilities
- Promoting community-planned and managed toilets wherever necessary, for groups of households
- Adequate availability and 100 % upkeep and management of Public Sanitation facilities in all Urban Areas

Awareness Generation and Behavior Change

- Generating awareness about sanitation and its linkages with public and environmental health amongst communities and institutions
- Promoting mechanisms to bring about and sustain behavioral changes aimed at adoption of healthy sanitation practices

Integrated City-Wide Sanitation

- Mainstream thinking, planning and implementing measures
- •Strengthening national, state, city and local institutions (public, private and community) to accord priority to sanitation provision
- Extending access to proper sanitation facilities for poor communities and other unserved settlements

Source: NUSP 2008 by GoI

For achieving the goals of NUSP in order to make the city totally sanitized, Government of India will support for-

States will be encouraged to prepare State Level Sanitation Strategies within a period of 2 years.

Identified cities will be urged to prepare model City Sanitation Plans within a period of 2 years.

Providing assistance for the preparation of Detailed Project Report (DPR) as per city sanitation plan as soon as requests for funding are received;

1.4 Overview of Sanitation Initiatives in Odisha

Odisha has the lowest level of urbanization (nearly 15 per cent of the state population of 37 million) amongst the major states in India. There is significant inter-district variation with Khurda district in coastal Odisha reporting an urbanization rate of 43 per cent at one end of the spectrum and Boudh in south-central Odisha, having an urbanization rate of only 5 per cent at the other. Urban Odisha population comprises of 13 per cent SC population (12 per cent of the state total) and eight per cent ST population (6 per cent of state total). Over the period 1991-2001, urban population has grown nearly twice than the state population. However, starting from a low base of urbanization, while these rates appear high; the challenges posed by absolute numbers do seem manageable⁴.

The State Slum Rehabilitation & Development Policy (SRDP) has been prepared and approved by the Govt. for holistic development of urban slums in the state. The overarching vision of SRDP is to build a Slum Free Orissa by the year 2020 and bring about a significant reduction in the urban poverty level. The policy is aimed at creating an enabling environment at the State and city level for citywide slum upgrading and poverty reduction.

Water Supply⁵

So far as water supply in urban Orissa is concerned, at present, about 776.48 million liters of drinking water is supplied per day to the 103 ULBs and 2 Census Towns in the state benefiting about 45.60 lakh people. There are about 25,000 nos. of hand pump tube-wells functional in different Urban Local Bodies and Census Towns.

Under Urban Infrastructure Development Scheme for Small and Medium Towns (UIDSSMT) 11 water supply projects are being implemented. Under the Revised Long Term Action Plan (RLTAP), 20 projects have been approved for an estimated cost of Rs. 155.64 Crore. Of these, augmentation of Water Supply to Bolangir, Titilagarh, Nawarangpur, Jeypur, Khariar Road, Koraput & Rayagada; Bhawanipatna, Kesinga, Binika, Khariar, Sunabeda, Kotpad & Jeypur are in different stages of execution. Five new projects as part of 'Augmentation of Water Supply' to Bolangir, Junagarh, Nawarangpur, Tarava & Malkangiri have been undertaken.

As part of Water Supply Project for Puri town⁶, the State Govt. has released Rs.41.72 Crore for implementation of the project. So far, expenditure of Rs.17.02 Crore has been incurred. Detailed planning, engineering, design and pre-tendering activities are under progress.

Amendments to Orissa Water Works Rules has been made by launching a programme called "PIYUSH" ("Amrut") with an objective of providing Universal Access to Safe Drinking Water in

⁴ Orissa Urban Sanitation Strategy 2011, H&UDD, GoO, Mar 2011

⁵ Minister's Budget speech, 2011

⁶ GoO Activity Report, 2010-11

Urban Local Bodies. The proposed scheme has enabled an urban poor to avail drinking water supply connection by paying Rs 500 only in 5 equal EMIs. This action is an evidence of State Government's commitments towards achieving Millennium Development Goal -7. Under devolution of powers to the ULBs, a novel tripartite MoA has been worked out involving the ULB concerned, the PHEO and the H & UD Department to make the PHEO accountable to the ULBs for water supply.

At present about 776.48 million liters of drinking water is supplied per day to the 103 ULBs and 2 Census Towns benefiting a population of 45.60 Lakh (approximate). Out of which, about 12.70 Lakh urban populations are benefited through 2,32,186 Nos. house connections and the rest 32.90 Lakh populations are served through 21,481 Nos. public stand posts. Besides, there are 24,273 Nos. hand pump tube-wells functional in different Urban Local Bodies and Census Towns to cater to the water demand during non-supply hours and demand of population residing in areas uncovered by piped water supply systems.

An amount of Rs. 2425.01 lakh has been provided for Urban W/S Programme in the Budget for the Year 2010-11 for 563 Nos. W/S Schemes. Out of which 238 nos. are new W/S Schemes, 80 nos. are having Token Budget Provision & balance are ongoing projects. Till end of December, 100 nos. of projects have been completed & balance are in different stages of execution.

Urban Infrastructure Development Scheme for Small & Medium Towns (UIDSSMT):

Total of 23 nos. Water Supply Schemes for 22 ULBs have been sanctioned under UIDSSMT. Of these, 17 nos. Water Supply Schemes have been accorded with A/A by Govt. Rs. 7528.27 lakh for 11 schemes have been received out of the estimated cost of Rs. 12861.35 lakh from concerned ULBs. The works are under progress. For preparation of DPRs of 3 nos. of schemes, State Government have released Rs. 200.00 lakh for one Scheme & authorization given for 2 schemes of Rs. 200.00 lakh each. The detailed engineering for 3 schemes are under progress by M/s Tetratech India Ltd. Funds for balance 9 schemes amounting to Rs. 22448.05 lakh are yet to be sanctioned & released. Out of 23 nos. W/S Schemes 1 no. scheme has been completed.

Access to Toilets

The urban sanitation scenario is a cause for concern – nearly 45% of urban households in the state do not have access to a latrine. The level of access to sanitation is even lower in the slum settlements of the urban areas. The impact of unsafe sanitation conditions and behaviour is immense, and one that adversely affect the urban poor, women and children. Besides poverty, lack of tenure, housing and environmental conditions in slum etc., constrains the urban poor households from gaining access to safe sanitation. Housing and Urban Development Department (H&UDD) of the Government of Odisha has prepared an action plan for 100% coverage of the state with sanitation facilities in urban areas and making the cities open defection free by the financial year 2020.

Under the Integrated Low Cost Sanitation (ILCS) scheme, 25 Detailed Project Reports (DPRs) in respect of 25 Urban Local Bodies (ULBs) for 423 low cost toilets have been approved by the State Level Coordination Committee (SLCC) and forwarded to HUDCO for appraisal & onward transmission to the GoI for release of funds⁷.

,

⁷ Budget Speech by H'ble Minister for H&UDD, March 2011

Total Sanitation Campaign⁸

Orissa State Water and Sanitation Mission (OSWSM) was formed on August 14, 2002 as a Registered Society under Society Registration Act to oversee the functioning of District Water and Sanitation Mission (DWSM) and to ensure effective implementation & monitoring of Total Sanitation Campaign in the State. OSWSM is the nodal agency at State level set up under the Chairmanship of Chief Secretary to Government of Orissa. The Commissioner - cum - Secretary to Govt., Rural Development Department is the Member Secretary.

A Chief Engineer, looking after day-to-day activities of OSWSM is the Additional Member Secretary of the State Mission. He is also the Director of Communication and Capacity Development. Unit (CCDU).

State Urban Sanitation Strategy

The State Urban Sanitation Strategy has been developed with the objective of making all cities and towns of Orissa Open Defecation Free by the year 2017.

Sewerage System

The project "Integrated Sewerage System for Bhubaneswar City" has been sanctioned for an estimated cost of Rs.754.23 Crore. Bhubaneswar city has been divided into six sewerage districts for smooth implementation of the project. So far, expenditure for Rs.121Crore has been incurred. Out of 193 kms of sewers under Sewerage District-III, 36 kms of sewers have already been laid.

For improvement of existing sewerage & drainage facilities and providing reliable sewerage & storm water drainage service in Cuttack city, a comprehensive project with financial assistance from Japan International Cooperation Agency (JICA) is being implemented. An amount of Rs. 945.13 Crore has been sanctioned for integrated sewerage and drainage system for Cuttack city and Sewerage district – VI of Bhubaneswar city, out of which Rs. 756.36 Crore is availed through the JICA loan and the rest amount of Rs. 188.77 Crore is borne by the State Govt. Besides, Rs. 100 Crore have been proposed under Externally Aided Project (EAP) for the year 2011-12.

Roads and Drainage

For strengthening of urban infrastructure, the ULBs have constructed CC roads and drains with budgetary allocation of Rs. 60 Crore during 2010-11. Construction of 200'.0" Master Plan four lane road from Sum Hospital to Shampur is under progress. Construction of 100'.0" Master Plan four lane road from Damana square to Netaji Subash Enclave at Gadakan is also under progress. Commercial Complex at Pokhariput, K-VII & K-VIII Kalinga Nagar, Kalyan Mandap at K-VII & K-VIII, Kalinga Nagar, Bhubaneswar is under progress. Rs. 3.33 Crores has been sanctioned for development of roads in Cuttack.

.

⁸ Report of state level workshop on formulation of Operational Guidelines for Implementation of TSC on 12th & 13th February'08

Under the Storm Water Drainage project for Bhubaneswar and Puri, the State Govt. has released Rs.35.41 Crore. Detailed planning, Engineering, Design and pre-tendering activities are under progress.

Solid Waste Management

With a view to streamline the solid waste disposal system in the twin cities of Bhubaneswar-Cuttack, a common regional land fill site at Bhuasuni is being developed on PPP mode. IDCO has been engaged as the Nodal Agency for the purpose. After the site is developed, 550 MTs of solid waste will be scientifically disposed of on daily basis, providing better and cleaner cities.

City Sanitation Plans (CSPs) for 8 Class – I cities and towns of Odisha i.e. Bhubaneswar, Puri, Cuttack, Balasore, Baripada, Berhampur, Sambalpur and Rourkela are being prepared.

1.5 Objective of Baripada City Sanitation Plan (CSP)

The task for preparing City Sanitation Plan for Baripada is part of the initiative of Government of Odisha to implement the National Urban Sanitation Policy in the State. The preparation of this plan is a joint effort of Government of Odisha, Baripada Municipality, AIILSG and MoUD under the leadership of NIUA.

The City Sanitation Plan for the city of Baripada aims at achieving sanitation infrastructure development along with developing awareness in the community and encouraging public private partnerships in the sector.

Following are the broad objectives of Baripada Municipality Sanitation Plan.

Eradicate the practice of open defecation in the city by providing household toilets, community toilets and public toilets.

Safe disposal of human excreta, solid and liquid waste

Improve the 'quality of life' of the sanitation workers.

Engage civil societies and communities (women in particular) in awareness generation, hygiene education, creation of sanitation infrastructure and its maintenance.

Strengthen institutional set up and build the capacity of the municipal staff for effective Program implementation and meeting the challenges of technology and management.

Encourage Public Private Partnerships (PPPs) to ensure generation of funds and sustainable program implementation.

Ensure inter-departmental coordination and integration of various relevant projects/schemes/programs for their optimum use and outcome.

6 Baripada City

Chapter 2: Profile of Baripada City

2.1 Location

Baripada is a city and a municipality spread over 20 sq km in Mayurbhanj district in the state of Odisha, India. Itr has 28 municipal wards. Baripada is also the district headquarters. It is an excellent place to stay and tour the Mayurbhanj region, a region with one of the most important wildlife parks of India (Similipal), lush valleys, forest lands and scores of ancient temples. It is the shopping paradise for the people of whole Mayurbhanj district.


Baripada is also the second most popular of Odisha for The Car Festival after Puri. It is also home to the world famous Mayurbhanj Chhau dance, an ancient martial Hindu dance form.

Baripada is located at 21°56′N 86°43′E21.94°N 86.72°E. It has an average elevation of 36 metres (118 feet)ASL.

Baripada was the first to experience a train communication in Odisha. The then Ruler of Mayurbhanj HH Maharaja Krushna Chandra Bhanjdeo connected Baripada by a narrow gauge rail network to the Howrah-Chennai railway corridor.

A broad gauge railway line has replaced it which has benefited over 150,000 of this city's population. As of now, a Baripada - Rupsa - Balasore DEMU Pgr. train and a Superfast Express train has connected this city to the state capital Bhubaneswar.

Regarding road transport, Baripada witnesses the maximum number of Luxury A/C bus owners in Odisha. There is a very good connectivity to Bhubaneswar, Puri, Cuttack and Kolkata from here. The city is merely 30 km from the starting point of N.H.5 which goes to Chennai. Also, this starting point named Jharpokharia, is the meeting point of N.H 5 & N.H.6 (Kolkata-Mumbai).

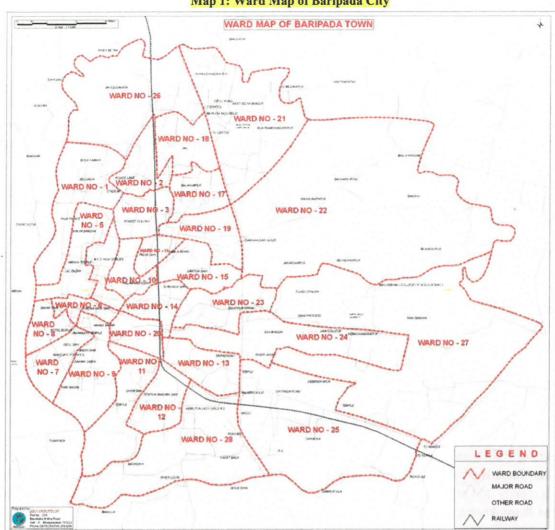

Map 1: Ward Map of Baripada City

2.2 Climate

The city has a tropical climate, specifically a tropical wet and dry climate. The average temperatures range between a minimum of around 12 °C (54 °F) in the winter to a maximum of 42-45 °C in summer. The south-west monsoons appear in June. The average annual rainfall is 154 cm, most of which is recorded between June and October.

2.3 Population

As per Census 2011 and as told by Barpada Municipality, the city has a population of 109769. The decadal population growth of the city is given in Table below.

Table 1: Baripada - Decadal Population

Year	Population	Growth, %
1991	49569	23
2001	95004	92
2011	109769	15.54

Data source: Baripada Municipality, Baripada

Baripada City

2.4 Slums in the city

There are 36 slum pockets. These slum pockets house 5228 families with 28030 population. Therefore, the total slum population is almost 25% of the entire city population. These slums are characterized by lack of proper roads, sanitation facilities, lack of source of clean drinking water, lack of drainage, lack of solid and liquid waste disposal system and low awareness levels of the people regarding sanitation and personal hygiene.





2.5 Health, Educational and Institutional establishments

Total Schools: 69


Total Colleges: 5 (Govt 1; Private/ Semi Govt. 4)

Public Institutions: 12

Hospitals: 11 (Govt 2; rest private)



2.6 Institutional Set-up of Baripada Municipality

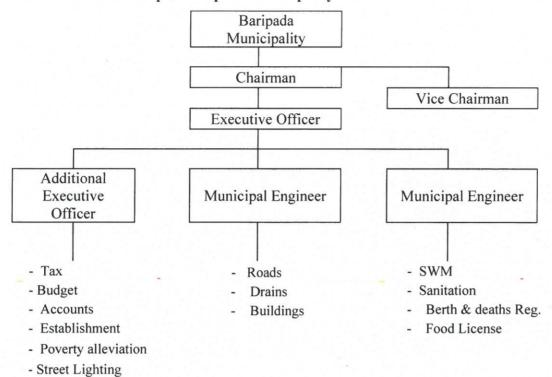

2.7 Staff Position of Baripada Municipality

	Staff Position, Baripada Municipality					
1	Head Assistant	1				
2	Municipal Engineer	1				
3	Senior Assistant	1				
4	Junior Assistant	4				
5	Junior Engineer	2				
6	Community Organiser	2				
7	Junior Steno	1 .				
8	Bill Mohari	2				
9	Work Sarkar	1				
10	Treasury Sarkar	1				
11	Tax- Collector (Holding)	3				
12	Octroi Tax Collector	35				
13	Amin	2				
14	Mali					
15	Light Checker	2 ·				
16	Peon	3				
17	Octroi Tax Peon	31				
18	Process Surveyor	1				
19	Warrant Peon	1				
20	Chainman	1				


21	Lasker	1
22	Choukidar	The same production of the same of the sam
23 .	Mali -cum-Peon	1
24	Jeep Driver	2
25	Tractor Driver	1
26	Truck Driver	1
27	Jamadar	3
28	Sweeper	47
29	Consolidated	42
Total		193

Chapter 3 : Approach & Methodology for Preparation of City Sanitation Plan

3.1 Approach and Methodology Adopted

The preparation of the city sanitation plan generally follows the Terms of Reference provided for the assignment by the MoUD and the framework given in the National Urban Sanitation Policy of Government of India. The preparations were guided by the NIUA and officials of Urban Administration and Development Department, Government of Odisha.

Following were the tasks and activities undertaken in line with the Terms of Reference given in preparing the sanitation plan for Baripada:

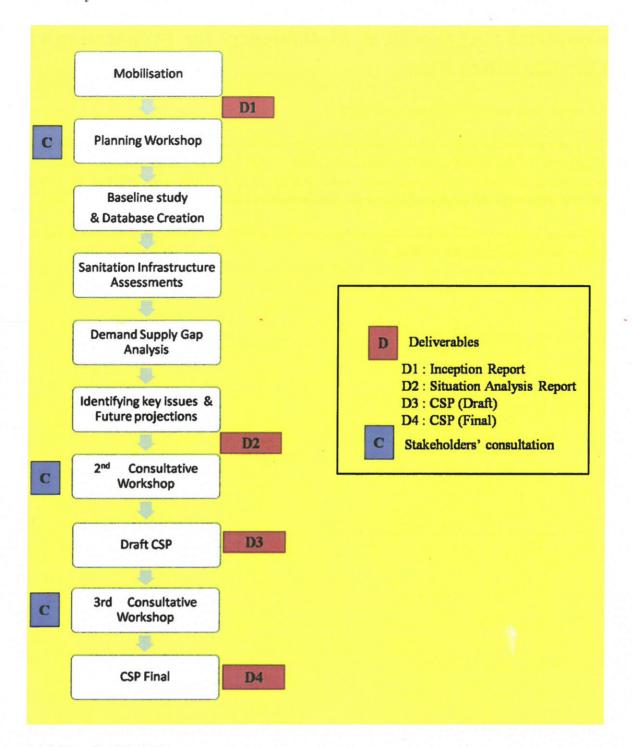

3.1.1 Planning Workshop

The first CSP consultation, a Planning Workshop, was organized at Baripada on 7th March 2011. The objective was to introduce the concept of the CSP, processes and the objectives in terms of defecation-free city. The planning workshop was organized at the Conference Hall of Baripada Municipality wherein the basic aspects and the need for preparation of City Sanitation Plan were discussed among the local population. There were 16 participants.

In the workshop, the consultant and its team (PRUDA – AIILSG) were introduced to the officials of the Baripada Municipality and the local representatives. PRUDA made a presentation on aspects of,

13 Baripada City

and processes in, preparation of the City Sanitation Plan, approach and methodology adopted, and the time span required for the preparation of City Sanitation Plan.

At the same time, PRUDA – AIILSG got a chance to interact with the local representatives and the Municipality official, from whom first hand information on city as a whole and on sanitation facilities was obtained.





The focus of the workshop was on the preparation of City Sanitation Plan as prescribed by National Urban Sanitation Policy and the suitable modification as suggested and agreed during the workshop.

The Regional Director, AIILSG (PRUDA), Bhubaneswar, Shri Debesh Patra welcomed the members present for the workshop. He briefed about the National Urban Sanitation Policy its vision and the Goal. He discussed the key issues which create problems to achieve the best sanitation practices in India. He also emphasized on community participation and support from the local residents as stakeholders.

The Executive Officer, Shri Purna Chandra Mishra, OAS briefed about the projects undertaken in the city for the betterment of the living condition.

A document containing all the details for the preparation of City Sanitation Plan for Baripada was circulated among the participants.

Asst. City Health Officer, Smt. Dr.Bharti Murmu discussed the sanitation issues. Suggestions from participants included improving sanitation facilities including awareness and training programmes.

Overall, the following aspects of CSP process emerged:

- Personal interface/stakeholder discussions required
- School sanitation may be covered in this programme.
- Support from concerned staff should be interlinked
- 20% Survey is not sufficient, so more than 50% is needed to be surveyed.
- Before conducting CSP, training of trainer (TOT) to be conducted
- Total participation of the ULB needed
- More NGOs and social organization should participate.
- AIILSG should discuss the issues of the Municipality staff, PHE, Sewerage and other Govt staff
- More number of toilets to required
- Emphasis on awareness of sanitation among the slum dwellers and changing their habit of open defecation.

Setting up City Sanitation Task Force

AILSG facilitated the formation of City Sanitation Task Force for Baripada on 7th March, 2011 to guide the sanitation plan preparation process for the city. There are 11 members included in the Task Force at the time of its formation and they are as below.

- Executive Officer, Baripada Municipality
- · Chair Person, Baripada Municipality
- Vice Chair Person, Baripad Municipality
- Chief District Medical Officer, Mayurbhanj
- P.W.D. Executive Engineer (R & D), Mayurbhani
- City Health Officer (Member, Convener), Baripada Municipality
- Executive engineer, P.H.D., Mayurbhanj
- Town Planning Officer, Baripada Municipality
- · Municipal Engineer, Baripada Municipality
- President/Representative of NGOs (Jan Kalyan Parishad)
- President Citizen forum, Mayurbhanj

AIISLG constantly interacted with the Task Force Members on various issues during the preparation of this sanitation plan. Task Force provided continuous support and valuable suggestions; those have been integrated while developing the plan.

3.1.2 The 2nd Consultative Workshop

The 2nd Consultative Workshop to discuss Draft CSPs of all cities in Odisha was held at Hotel Mayfair at Bhubaneswar on 12th Sept 2011. Apart from Pruda staff at Bhubaneswar, the workshop

was attended by H'ble Housing and Urban Development Minister Sri Sarada Prasanna Nayak, Commissioner-cum-Secretary, Housing & Urban Department (H&UD) Mr. Sourav Garg, IAS, officials of Bhubaneswar Municipal Corporation, Cuttack Municipal Corporation, and Puri, Balasore, Baripada, Berhampur, Rourkela and Sambalpur Municipalities. Officials from MoUD and WSP also remained present. NIUA was represented by Shri Naveen Mathur, Shri Ajay Nigam and



Shri Mukesh Mathur. The Regional Director of All India Institute of Local Self Government and PRUDA presented the draft CSPs.



Sri Debesh Patra, Regional Director of PRUDA (Bhubaneswar) made presentations on draft CSPs of 5 cities viz. Bhubaneswar, Cuttack, Puri, Balasore and Baripada. They were commented upon, and critiqued by delegates in the audience. Some important suggestions were as follows:

- 1. Format as given in the meeting held earlier and as agreed upon may be followed.
- 2. SLB data may be included. Open defecation figures may be rationalised by including non-slum areas.
- 4. O&M costs for any proposed sewerage/drainage may be covered in projected Sanitation O&M

- 5. Bhubaneswar population should be 8.38 lakhs and not 10.60 lakhs as told by the Jt. Secretary, H&UD (and later confirmed with BMC- all projections should be accordingly
- 6. Pruda should visit all cities for certain data validation to avoid confusion.
- 7. Pruda should visit again later with slide show to train the EOs as they would now make revised presentation on 7th Nov 2011 (proposed).

3.2 Baseline Data Generation and Creating Database/GIS

Baseline data was collected and generated through several visits, consultations, facility condition assessment surveys, and household surveys conducted across the city. Primary and secondary level data was obtained on availability and adequacy of sanitation facilities, hygiene and sanitation practices, socio-economic conditions, perceptions on present sanitation services, willingness to pay or contrary, and information on institutional related issues and finances. GIS maps were developed based on the base maps specially prepared using the information collected from the field.

Condition Assessment Surveys

Situation Analysis of the existing sanitation facilities and services was carried out through condition assessment surveys along with the concerned municipal officials and consultations with them on the performance of these facilities. Such surveys covered obtaining comprehensive information on collection, conveyance, and treatment and disposal facilities in respect of sullage, sewage and solid waste generated in the city. This information was useful in understanding the adequacy of the available facilities, current performance and physical condition, and gaps in meeting the sanitation needs of the city.

Ward-wise Assessment and Consultations

Specific sanitation needs of the residents of Baripada, especially of the poorer families residing in slums and underdeveloped areas of the city, ward-wise assessments using various participatory techniques such as Focused Group Discussions (FGDs), structured interviews and transect walk etc. were conducted in select wards to assess sanitation facilities, understand the sanitation needs and priorities of residents, perceptions and preferences for sanitation technologies and their willingness to contribute to the facilities and participate in operation and maintenance.

A sample representing 20% of 28 wards was selected and consultations were held to discuss the potential technical options and their financial implications in terms of capital and maintenance costs, to gauge the acceptance and affordability of such options among residents. Discussions were also held with municipal councilors to understand their vision for improving sanitation in Baripada.

3.3 Preparation of City Sanitation Plan

Development of Technical Options

The findings of the ward wise assessment and consultations have been used to refine the technical options further and develop cost effective and techno-economically feasible sanitation options in areas of household sanitation, wastewater management and solid waste management. The other but important considerations for suggesting technical options included the current performance of sanitation technologies used in the city, the geology and topography, affordability of users, capacity

and skills available within the city for operation and maintenance of the proposed facilities, and the available best practice technologies used in India.

While preparing budgets for the new improvements that are required, block cost norms based on the Schedule of Rates (SoR) developed by Urban Administration and Development Department of Odisha, and costs observed in other cities in Odisha have been considered as these were not readily available for Baripada. Funding sources for financing the proposed sanitation improvements have been identified and indicated in the proposed Sanitation Plan.

3.4 Preparation of Implementation Plan

The implementation plan has been developed for the city based on the priorities identified for the, medium term and long term within a time horizon of 10 years from 2011. Short term plan focuses on immediate improvements required in the city that address needs identified during the ward-wise assessments in the city. Some of the key needs are achieving access to sanitation facilities in poorer areas thus making the city open defecation free, improving solid waste collection and improving coverage of drains to address recurrent water logging/flooding problems in various parts of the city. Medium term and long terms plans are developed in a progressive manner to achieve integrated city wide sanitation by the end of the 20 years. Medium and Long Terms plans have been developed to focus on augmenting the sanitation infrastructure and services and achieving financial as well as operational sustainability in sanitation services.

Capacity building and Awareness Strategy are integral parts of implementation plans and these have been developed considering local context and needs.

17 Baripada City

Chapter 4: Situation Analysis of Sanitation Facilities and Services

The focus of the entire city sanitation plan is on the slums as these slums are bereft of proper sanitation facilities. These slums are identified by overall poor sanitation conditions. Open defecation due to lack of individual and community toilets, disposal of waste in the open, often by burning, lack of proper roads, lack of service delivery, lack of proper drainage, lack of public health facilities are some of the grappling issues of the slums. During a sample study of the slums, it was found that there are no community toilets and only 4 pay & use toilets. That means more than 90% slums do not



have access to community toilets. If we look at the slum profile of Baripada, then we find that more than 90% slums do not have access to both individual as well as community toilets. This clearly underscores the fact that almost most of the slum population and at least 84% of the city population does not have access to toilets and defecate in the open.

% of respondents	Household and Community Sanitation	Sr. No				
15	No of families using toilets	1				
	Type of Toilets used	2				
15	Individual Toilets					
0.1	Neighbour's					
85	Open Defecation					
	Type of Toilet used by children	3				
33	Open Defecation					
	Waste Water Disposal from the Toilets	4				
80	Septic Tank					
18	Soak pit					
1	Open Gutter					
1	Sewer pipe					
	Disposal of infant's excreta	5				
0.2	Gutter					
21	Toilet					
0.58	Open field					
79	Other					
	Reason why individual latrine was not build	6				
2	Not planned					
90	Not affordable					
6	Shortage of area					
3	Other reason					
	Type of latrine would be preferred	7				
90	Individual					
8	Group					
2	Public					

8	Cleaning of community drains regularly	43

4.1 Water Supply Status

Description	Baripada
Total production of water (MLD)	10.30
No. of connections	6149
No. of Stand-posts	317
No. of tube wells Hand pumps	Nil
Coverage (direct piped connection)	21%
LPCD	32
NRW (%)	72
Hours of supply (Hrs) daily	3
Cost Recovery (%)	24

The water demand⁹ in 2011 is 15.12 MLD at 135 LPCD based on current population. The water supply is less than demand, at 10.30 MLD at 92 LPCD. The NRW being 72%, the citizens of Baripada actually receive 32 LPCD of drinking water. The distribution pipeline length is of 86 km length and the water supply coverage is just 21 per cent.

Out of 28 wards, 23 numbers of wards are fully covered and 5 of them are partially covered. There are 317 stand posts exist in the city.



Only 20-30% of the slum residents get piped water supply against taxes paid. The rest fetch their water from Hand Pump tube wells. It is reported that the water supply in slums is irregular and inadequate. The water supply coverage thus shows inequities in terms of distribution for the urban poor. One must however take into account the unauthorized slum population and households not willing to pay.

In this background, the present system of water supply requires augmentation of infrastructure facilities for meeting the actual demand.

4.1.1 Projections and Gap Analysis

⁹ As per the information given by Baripada Municipality, Baripada

The current water production 10.3 MLD and a citizen in Baripada actually receives only 32 LPCD which means supply shortage in 2011. Over a short term up to 2021, and long-term, up to 2031, there is a progressively increasing gap in demand-supply and (water treatment capacities and storage) capacities as given in the Table below:

Table 3A: Demand gap Analysis


Year	Population Projection in Lacs	Water Demand in MLD	Present Water Availability in MLD	Surplus Water in MLD	Deficit in MLD
2011	109769	15	10.3		5
2021	132036	18	10.3	-	8
2031	155657	21	10.3		11

4.2 Household and Public Sanitation Facilities

It would be pertinent to note that there is no sewerage system in Baripada. In other words, all the wards have open drains.

Description	Baripada
HH with access to Individual toilets	19395
Sewerage network Coverage (%)	0
Major HH sanitation practice in slum	Temp Pit & Drain
No. of community toilet seats	49
No. of public toilet seats	49
User Fee (Rs)	2
% Open Defecation city-wide	21
% Open Defecation in slum	85
Final sewage disposal point	river

There was sample survey of 864 numbers of households done by AILLSG team. Based on sample survey, it is estimated that only about 15 % slum families have access to toilets in the city. Those who have access to toilets in the city use either individual toilets or municipal public toilets/pay and use toilets. Remaining population is estimated to be defecating in open. Around 85% of people have their




individual tap connection, bathrooms and own latrines in the city.

4.2.1 Access to Sanitation at Household level

Only 3360 of the sample population have individual toilet facility while from 15% population, 80% have septic tanks and 18% covered under the soak pits. There are only 4 public toilets maintained by Sulabh International. There is no any community toilet available in Municipality.

In few areas, water scarcity or non-availability of general water points in nearby locations have forced families to go out for open defecation **despite** having toilets with them. Households demanded water points to ensure sufficient water supply to them.


Overall, individual toilets are preferred by majority of the households. Open field defecation is preferred by poorer families



and toilets with septic tanks are preferred by middle income group families. Around 5% of people are preferred public toilets, Pay & Use and neighbour's toilets.

4.2.2 Disposal of Waste Water from toilets


- 1. 80% of the toilets are connected to Septic Tanks in the city.
- 2. 18% of the toilets have soak pits.
- No any toilets are connected to underground sewerage system because of non-availability of sewerage system.



4. The percent of latrine waste water disposal in open field and open gutter is about 2%.

4.2.3 Areas where open defecation is practiced

As per the survey the open defecation is practised at majority places of Belgadia, Bhugudakata, Bijay Ramchandrapur, Jamunadeipur, Madhubana, Purnachandrapur, Sun Gadia, Tulasi Chaura, Walli Ganja etc. These areas are found to have inadequate sanitation facilities. Few of the better off families



have individual toilets but the poor families have to rely on open defecation in absence of any public toilet facility in the vicinity.

- 2. Open defecation rate in the survey area is 85%
- 3. 1 % of the respondents dispose the excreta of infants in the open field or gutter. Bins are not provided adequately.
- 4. 83 % of the households in the survey area do not segregate the waste.
- 5. Bins are not provided adequately.

The waste collection from municipality bin is done randomly 46% or weekly 14%. At 29% places the municipal bin waste remains uncollected, which includes some places of Madhubana, Sun Gadia, Tulasi Chaura, Walli Ganja etc.

4.2.4 Population resorting to open Defecation

City-wide open defecation at Baripada is at 21% as reported by the municipality. The household level survey conducted by AIILSG reveals that approximately 85% slum population – mostly from economic weaker sections and living in slums and newly developing areas resort to open defecation due to lack of individual or community sanitation facilities in their area.

Ward-wise consultations have revealed that the scarce or non-availability of municipal water supply in the vicinity have also affected the use of individual toilets either constructed on their own by households. For example, in most of the slum, the families go out for open defectaion when they do not receive water from the nearest public stand posts/hand pumps since enough water is not collected to maintain the toilet.

4.2.4.1 Gap Analysis - Household Sanitation

About 85% of the total slum population does not have access to any sanitation facilities and therefore, they resort to defecating in open. Large proportion of children also defecates in open. It is a common practice to dispose infants' excreta in open. Our survey indicated that over 33% of households having children defecate in open fields and over 0.5% of the households throw infant's excreta in open field in unsafe manner (As per the household survey). Overall situation causes unhygienic conditions in the city area and also poses risks for spread of diseases through flies and ground water contamination.

In areas where water logging problem persists especially in monsoon, such areas pose constraints for pit technology for latrines. Congested areas in the heart of the city and smaller plot areas also pose space constraints in construction of latrines and discourage households to construct latrines. The household level survey indicated that more than half of the population is urban poor, and falls under BPL category. They have low paying capacity, and yet such households prefer to have individual toilets. There is a willingness to pay among 22% of such households, and the rest are not willing to pay for toilets.

4.2.4.2 Key Issues in Household level sanitation

Maximum percentage of population has been observed practicing open defecation. Generally, children defecate in open areas and infant's excreta are thrown in open fields and at other places in unsafe manner. These areas do not have public/community toilets for use.

Lack of space availability, affordability, dense housing structures, and rental accommodation affects the construction of toilets and septic tanks. Inadequate public and absence of community toilets also affects the access to sanitation facilities to those who do not have toilets at their homes.

Overall lack of willingness to pay raises the financial burden of constructing new toilets and funding options need to be worked out.

4.2.4.3 Septage Management

Septage from septic tanks and pit latrines is collected by the Municipality using suction machines available with them and disposed off in the current landfill site used for dumping solid waste of the city. Septic tanks are cleaned once in a year based on the request from households. Generally, around some too less numbers of tanks are cleaned per year within the city limits, according to the municipal officials.

4.3 Public Sanitation facilities


There 49 Community toilet seats in the city but none in the slums. There are only 4 Pay and use toilets also having 49 seats in slums of which all are functional. These are inadequate looking at the fact that half the city is slum area.

The 4 public toilets blocks in city are maintained by Sulabh Souchalaya on pay and use basis (As per the information by Municipality). Users are charged Rs. 2/- per single use for both men and women. Tourists and few local residents use the toilet facility. The physical condition of public toilets is not good as they are poorly maintained.

O & M Issues

All toilets are cleaned on daily basis with acid, phenol and bleaching powder. The toilets are connected to Septic tanks and effluent from the septic tanks is discharged into municipal open drains/sewerage system as applicable.

The public toilets with pay and use model exists and are being run with the private sector involvement. However, the use of these toilets is considerably low probably due to the user charges. Replication of such models in other parts of the city may pose difficulties in running them on financially sustainable basis. Further, such pay-and-use toilets are not generally accessed by children – on account of user fees as well as non-child friendly designs of such toilets. Infrastructure of the toilets is of very low quality. These aspects require careful considerations while planning future public toilets in case these are proposed.

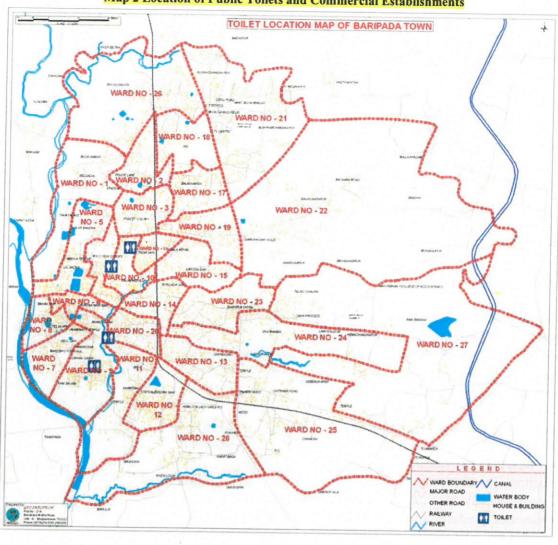

Map 2 Location of Public Toilets and Commercial Establishments

As far as condition of sanitation, 2688 sample households have access to septic tanks and 605 have access to soak pits as well as low cost sanitation facilities. As far as public toilets are concerned, there are 4 public toilets with bath. Overall availability of public toilets in the city is very inadequate in the crowded areas like market places such as Bus stand, Biju circle, near District head quarter hospital and Madhuban, etc. The existing market places bring in considerable floating population from the surrounding region which does not have any kind of sanitation facility. Women, especially suffer severely due to absence of such facilities. Such public places, in turn being heavily crowded, showcase filthy and unhygienic environment, especially on the days when weekly *bazzars* are conducted on different days.

Major institutions such as Schools, Hospitals and health centres were visited to assess the use and adequacy of sanitation facilities in these institutions. About 5 educational institutes were visited which included government as well as private schools and colleges.

4.3.1 Gap Analysis - Public Sanitation Facilities

As per CPHEEO guidelines for public sanitation facilities for market places, hospitals and other public utility buildings, 1 urinal per 200 users and 1 seat per 100 users should be provided.

- Field visits to the crowded market areas in the city and the discussion above makes it
 explicitly obvious that there is a huge gap between norms and the fact that there are only 4
 pay-and-use and no community toilet in entire city of Baripada, let alone the floating
 population to market places.
- Public level sanitation facilities for women are grossly lacking in the city, especially in the market area.

4.4 Drainage

4.4.1 Sewerage System

Baripada Municipality has no sewerage system as mentioned earlier and as a result majority of sewage flows through open drains. Majority of the existing systems are not functioning well.

4.4.1.1 Generation of Wastewater

At reported 92 LPCD, the total water supplied at Baripada is 10.3 MLD. Considering 15% NRW, and at 80% standard wastewater production, an estimated 7.00 MLD is the total wastewater generation in



Baripada per day. There is a waste water treatment plant in Baripada at the Bel Gadia in front of Collector Office.

4.4.2 Storm Water Drainage System

- Road length; 129.5 km
- Total pucca/kuchha drain length: 142 km
- Drainage Coverage: 5%
- Incidents of waterlogging/year: 7

Baripada has a network of 2 major natural drains; they are primarily catchment drains that receive storm water from whole city area and covey the same from inhabited areas.

The drains (Pucca and Kuccha) are maintained by Baripada Municipality. The total length of the drains is reported to be approx 142 km^{10} .

The existing drain scheme is more than a decade old and the same is functioning now. The total waste water generation is 8.13 MLD (80 percent of water supply). There is no systematic sewerage system or treatment plant in the city; the discharge of domestic waste through storm water drains goes to river. As a result, the quality of water in Chipat river shows deterioration. The discharge of sewerage into storm water drainage is also causes ground water pollution.

The drainage facilities demands management of drains, that involves the prevention of flooding and illegal encroachments, periodic maintenance, and provisions of adequate land for future reconstruction and augmentation activity.

4.4.3 Existing status of Sullage Management

Drains are used to dispose sullage water, sewage and stagnated water on the road. Most of the city roads have open drains. However, their functioning is hindered by blockages due to solid wastes dumped in drains. Narrow drains, drains with improper slopes or non-existence of drains in some areas have caused flooding and water logging thus increasing the risk of diseases like malaria etc. Existing drains are also used to carry effluents from latrine pits as well as from septic tanks. In few pockets, a raw sewage was also being discharged in the drains from the latrine pits.

4.4.3.1 Gap Analysis - Drainage System

- Improvements of existing main and tertiary drains and channels and implementation of new sewerage system in whole city.
- Improvements in channel sections of major drains
- · Reconstruction/widening of major drains for enhanced hydraulic capacity

There are still some areas without drains especially in some of the wards which have less than 60% of drainage coverage. Cleaning of the drains is not frequent and in some areas, it is almost absent due to insufficient staff and equipment causing flooding and stagnation of wastewater.

Based on the assessment done in the field, the performance of drainage system in the city is rated as below par and a lot needs to be done.

*As per Baripada Municipality, Balasore

4.4.4 Key Issues

- Lack of drainage network system in the city which would collect convey and dispose the storm water efficiently.
- Existing open drain channels act as the sole means of conveyance of waste water as well as storm water.

¹⁰ As per the information by Baripada Municipality, Baripada

 Lack of design considerations and absence topographical analysis results in chocking of existing drains and frequent incidences of water logging.

4.5 Solid Waste Management

Description	Baripada
No. of wards with DTD collection	NA
Household level coverage (%)	53.3
Total generation (Tons per day)	33
Efficiency in collection (%)	70
Segregation practice	None
Land fill site	Open dumping
Scientific Land Fill Practice	-None

The city of Baripada generates 33 metric tonnes of solid waste is every day, at 0.3 gms per capita generation. To collect the waste from the city and to keep the city clean, 206 personnel have been deployed by the Municipality. Mainly wheel barrows, tri-cycles and tractors are used for transportation of solid waste. According to the data provided by the Baripada Municipality, there are 38 push carts, 47 bins available which are pressed into solid waste collection and transportation every day.

4.5.1 SWM - Gaps

In general, SWM remains non-compliant with MSW Rules 2000 in all sub-sectors such as segregation at source, processing and scientific disposal. The waste collection efficiency is 70 per cent.

The major contributors of MSW include domestic, institutional, commercial, hotels and restaurants, temples, marriage halls, street sweeping, construction and demolition, industrial, and biomedical wastes. A



substantial part of the MSW generated remains unattended and grows in heaps at poorly maintained collection centers and dumping yards. The choice of a disposal site also is more a matter of what is available than what is suitable. There are waste bins to collect, mainly, the household wastes, but the system is not efficient. The bins are, however, only randomly provided in most of the Baripada areas. Further, these waste bins are inadequate in size and are open, thus providing easy access for birds and other animals. Some of these bins are often misplaced, forcing the residents to throw away garbage in open areas of the probable bin sites. Even when the bins are available, wastes are sometimes thrown outside the bins anyway and since the wastes are always thrown loose the problem become unmanageable very quickly. Not only in the residential areas, loose wastes from large market places and grocery centers are thrown on the ground around the roadside waste bins. Stinky rubbish lies

around the waste bins in the residential areas and market centers for a long time before being collected by the waste collectors. The collectors have to clean up the areas messed up by loose waste and shovel the loose waste into baskets, and then onto trucks¹¹.

28

¹¹ As per the information by Baripada Municipality

<u>v</u>

Chapter 5: Technology Options

5.1 Options for Latrines/toilets (Onsite disposal)

Following options are suggested for the onsite collection at household level.

5.1.1 Pit Latrine:

Simple leach pit latrine is the basic low cost toilet for containing the human excreta safely. A pit is either constructed directly below the latrine superstructure or constructed away (Offset) from the superstructure. This could be decided based on the availability of space. If adequate space is available, standby pit can be constructed adjacent to the existing pit. The Pit is lined with open-jointed brickwork, similar to the single pit design. When the pit is full, it should be cleaned and emptied after allowing some time for the fecal matter to decompose. Pit latrines are easy to construct using the local available material and are also cheap and can be afforded by poorer families.

Superstructure

Connecting Drain

Cover Sta

Water-Seal Pan

5.1.2 Eco Sanitation Latrines

Ecological sanitation latrine (referred as eco san toilet) is a dry type of latrine where latrine urine and other water content are separated from faeces and are collected separately. It consists of two water tight chambers for faeces collection. No water is to be utilized along with faeces and it is collected in the chambers are covered with saw dust, soil, leaves or any other material that can help faeces decomposition. These two chambers are expected to use in alteration one after another. Ones the tank is full of faeces, it is allowed to decompose for a period of year and then the decomposed matter can be used as manure at fields.


Water used for anal cleansing and urine are collected separately. Urine collected from this system can be used for gardening and water used for anal cleansing can be disposed off separately by constructing soak pit.



5.1.3 Flush Toilets with Septic Tanks

A septic tank is a chamber, essentially underground, which collects and stores domestic wastewater (grey and black) Organic waste is treated there under anaerobic conditions. Effluent from septic tanks should be discharged to soak pit which acts as an infiltration system. It is recommended that the effluent is treated on-site before discharge into surface water.

The standard septic tank design incorporates two chambers as shown below. Most of the treatment takes place in the first chamber. Properly designed septic tank will remove about 50% of the biological load in the wastewater.

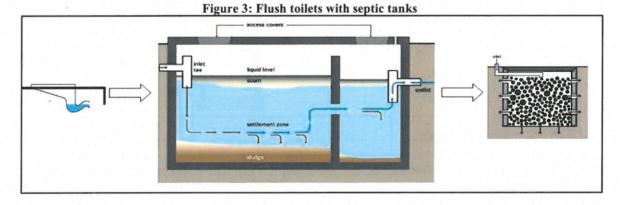

5.1.4 Flush Toilets connected to the proposed sewerage system

In this option, pour flush toilet is directly connected to the sewerage system. The water component as well as faecal part of waste generated and disposed though latrine is carried through sewer line to the Sewer treatment Plant (STP). Such toilets are useful when water is use high and it is available. Such toilets are expensive and are most suitable for areas where sewerage system exists.

5.1.5 Community Toilets connected with septic tanks

The option of **community toilets** is suggested considering the socio economical background of the city population. The **community toilets** are suitable in the areas where people are of low income groups (slums or economically weaker sections) where affordability level of having/constructing and maintaining individual toilet is very low. It is suggested that the community level toilets can be

provided at such places which will be connected to septic tanks to ensure onsite treatment of waste. Community toilets are suitable when it is difficult to construction individual toilets especially in poorer areas of the city, either on account of lack of space or non-affordability among poorer families to construct their own toilets.

Operation and maintenance of such toilets is challenging unless a dedicated arrangements are made for regular cleaning. In view of the poorly maintained toilets in many part of the country, they are now being operated on pay and use basis to ensure that they are maintained clean.

5.2 Options for conveyance system

Water availability in near future will influence the choice of the citizens for toilets and the amount of water they use in cleaning the sanitation facilities. When more water is available, citizens tend to prefer water flush toilets over Pit toilets. However, increased amount of sewage water adds to the challenges of on-site disposal of the sewage considering low permeable soil conditions and water logging situation in the town. Off-site disposal is therefore suitable.

There are various technology options that could be applicable and used in Baripada for collection and transportation of sewage. These are:

5.2.1 Small bore sewerage and Shallow Sewer system

Shallow Sewer and Small bore sewerage system are cost effective and may require to be supported with decentralized treatment facility. Shallow sewers are suitable in areas of high water use and low traffic situation.

Small bore sewerage system uses small diameter sewers laid at shallow depth and connected with interceptor tanks at the household level connections. The system requires decentralized treatment facility. Interceptor tanks require maintenance by households.

5.2.2 Conventional Underground Sewerage System

Conventional underground sewerage system requires high capital and maintenance costs. In case of Baripada, high proportion of BPL population may not afford high cost of maintenance of conventional sewerage system. Also, narrow roads and dense development might affect the efficiency of the network. It is therefore necessary to consider cost effective system in the town that is affordable and operated in a financially sustainable manner.

5.3 Treatment System (Off Site Sanitation)

5.3.1 Waste stabilization ponds

Waste Stabilization Ponds are a series of anaerobic, facultative and maturation ponds. These are connected in series to provide a two or three stage treatment process. Waste Stabilization Ponds with two stage treatment processes comprising anaerobic and facultative ponds are suggested for the city.

- Anaerobic Ponds: These are small ponds with depth 3-4m. The sewage is treated and digested by anaerobic bacteria.
- Facultative Ponds: These are shallow ponds (1.5-2m depth) with large surface area. They
 consist of aerobic zone close to the surface and a deeper anaerobic zone at the bottom. These

are suitable for medium to low density habitations like Balasore and are effective in removal of pathogens. BOD can be decreased to the extent of 70-95% in ponds. Ponds are easy to operate and maintain.

 Maturation Ponds: These are again shallow ponds with depth of 1-1.2m with a large surface to enable light penetration.

The cost data suggests that Waste Stabilization Ponds may be marginally expensive in capital costs compared to other treatment technologies but it is the cheapest technology in terms of O&M costs which small municipalities like Baripada can afford. The treatment technology requires large land which is available around Baripada. Treated water from the ponds could be used for irrigation and that needs to be promoted among the farmers around the pond area for utilization of wastewater as well to generate revenue. It was informed by Baripada Municipality officials that reusing water for irrigation by farmers may be challenging around the city as many of them have their own ground water sources for irrigation.

5.3.2 Conventional Sewage Treatment Plant


Conventional sewage treatment plant may be designed based on activated sludge process. This process involves rapid mixing and aeration of wastewater followed by a secondary settling tank designed to remove suspended micro-organisms prior to discharge. Active biomass is recirculated to the aeration tank.

Such plants are used for the treatment of municipal wastewater from medium to large towns. The plant however consumes high energy resulting in high recurring costs.

5.3.3 Decentralised Wastewater Treatment System

The most predominate sewer system relies on a Centralised Treatment System in which all the waste water/ effluents generated from sources such as houses, schools, hospitals, industries etc are collected and taken via open or covered drains / sewers to a centralized treatment plant. In most cases, storm water is also drained through these drains. These systems are mostly based on Aerobic treatment procedures. These centralised aerobic systems require large land areas, high power and skilled labour for regular maintenance.

DEWATS or Decentralised Waste Water Treatment System on the other hand looks at smaller dispersed treatment systems, which are basically anaerobic, with low maintenance, low



cost. It is now well established that such Decentralised Anaerobic Treatment of Sewage and Waste water, is suitable for tropical climates like India. DEWATS is basically not a system to deal with excreta alone. It is part of a larger system to treat and re-cycle waste-water from all domestic and industrial and other sources. DEWATS also does not actually refer to a particular technical design or structure. DEWATS is an approach that uses several processes to treat wastewater, which is adapted to the local situation.

In Structure, DEWATS works like a sewer system, except the system is decentalised, which makes it simpler in process, technology, and operations and maintenance. It has three characteristics or rather, basic principles on which it is applied:

- Decentralization: Responsibility, Capacity, Treatment.
- Simplification: Process, Technology, O&M (operations & maintenance)
- Conservation: Recycling Water, Nutrients, Energy


Waste Treatment

Pre-treatment is done to eliminate solids by putting in an interceptor tank like a septic tank where all settle-able solids settle. The interceptor tank can be provided for every house or for a cluster depending on space availability. The solid-free effluent is then let into the collection system. The sewers are laid at shallow depth as there is no solid component in the effluent, no regular manholes required. However a clean-out can be provided which can be used to push water to clean up in case of any clogging. Since solids are seperated out at the first stage, deep sewer lines are not required. Treatment of this effluent waste is done in decentralised clusters through a variety of secondary and tertiary treatments systems such that the effluent conforms to discharge standards of the Pollution Control Boards. This treatment is based on four treatment systems:

· Sedimentation and primary treatment in settlers, septic tanks or Imhoff tanks




Secondary Anaerobic Treatment in Anaerobic Baffled Reactors or Anaerobic Filters




Anaerobic Baffled Reactor

• Secondary and tertiary aerobic / anaerobic treatment in Planted Gravel Filters



• Tertiary anaerobic /aerobic treatment in ponds.



Further the water is such that it can be used for irrigation and other non-portable purposes. The various process are chosen such that the treatment process is does not need electricity and they are reliable and durable, requiring minimal maintenance

Since it is decentralised: The design and nature of treatment can be specific to the nature of waste including domestic and industrial waste.

The waste doesn't have to traverse long distances, distances thereby eliminating huge costs on pipes, pumps and appurtenances. The main disadvantage of the technology is that it requires space at the local level. Also like all decentralised and locally built options, quality.¹²

5.3.4 Anaerobic baffled reactor (ABR)

It consists of a settling compartment of equal dimensions followed by a number of smaller compartments. Sewage passes through the compartments from bottom to top. Baffled reactor involve a combination of physical treatment and anaerobic digestion as the incoming wastewater passes through a blanket of suspended flocculation of active bacterial sludge in each compartment. BOD removal is about 70%. It is suitable for small community schemes or housing settlements with no access to municipal sewerage. ABR process is however capital intensive.

¹² Taken from ECOSAN Costing. TNTRC Newsletter. www.tntrc.org

Plan
Sanitation
City
Final

Option Adva Onsite disposal					
	Advantages	Disadvantages Capital cost	Capital cost	O&M	Intensity of Impact on environment
• Fac					
Pit latrine Pit latrine Pit Reference Predictions Pre	Easy construction techniques with locally available and materials low construction cost Less space availability Faecal material can be used as soil conditioning Reduction in pathogens to a considerable level Reduced in foul odours due to effective ventilation	 Manual removal of sludge Possibility of ground water contamination 	Low	Low	Low
Suit Eco Sanitation Latrines	 Suitable in water logged areas. Requires less water. Separates Urine and Excreta and both can be used as rich manure. 	 Requires careful use while cleaning of anal to avoid entry of water in excreta hole. Higher cost as the vaults are built above ground. 	Low	Moderate	Low
Can mate Flush Toilets with Septic No e Onsi tank	 Can be built with locally available materials Preferred for long term usages No electrical energy required Onsite treatment carried with septic tank 	Comparatively higher construction cost than pit latrine Requires more space than a pit latrine. May not be suitable in densely developed or congested areas may due to unavailability of space	High	Low	Low

Option	Advantages	Disadvantages	Capital cost	O & M	Intensity of Impact on environment
Flush Toilets connected to the proposed sewerage system.	Saves investments on pits or septic tank.	Requires high amount of water for cleaning	High	High	High
Community Toilets connected with septic tanks	 Suitable for slum areas and low income groups Can be seen as source of revenue generation Onsite treatment carried with septic tank 	High maintenance cost Requires more space than a pit latrine. May not be suitable in densely developed or congested areas may due to unavailability of space	High	High	Low
Conveyance system					
Small bore	Less Expensive due to smaller size of sewers. Suitable for small communities	May not be suitable for large communities	Low	Low	Medium
Shallow sewer	Relatively less expensive as the sewers are laid at shallow depth with inspection chambers	May not be suitable in areas where traffic load on roads is high	Moderate	Moderate	Medium
Conventional Underground Sewerage System	Can carry any flows and suitable for medium and large populations	Capital cost high	High	High	Low
Treatment					
Waste Stabilization ponds	Low operational cost Treated waste water can be used for irrigation purpose	 Requires more land area 	Moderate	Low	Medium
Conventional Sewage Treatment Plant	Can handle any organic loading	High Energy Consumption and maintenance	High	High	High

Plan
Sanitation
City
Final

Option	Advantages	Disadvantages	Capital cost	0 & M	Intensity of Impact on
		requirement			cuvii ominent
Anaerobic baffled reactor	 Useful for smaller communities with 	Periodical removal of			
(ABR)	no access to municipal sewers	sludge required	High	High	High

Source: Technology Options for Urban Sanitation in India, Gol, 2008

5.4 Collection, Treatment and Disposal of Liquid Waste (Off site treatment)

With water supplied in excess of demand in Baripada, there will be more sullage and sewage generated in the city. Low lying areas with poor drainage arrangements offer challenges for on-site sanitation for disposal of increased quantities of sullage and sewage. Possible on-site and off-site technical options for sullage and sewage are discussed below.

<u>Sullage</u>: Currently, sullage is disposed off in open drains. There are problems with effective functioning of the drains either on account of narrow drains or blockages. By resolving these problems, it may be possible to collect the sullage effectively across the city. Sullage however needs to be disposed off safely with treatment and this could be done at various places in the city as the flat terrain of the city may not allow carrying all the sullage to a single point of disposal.

Until the proposed sewerage system or other decentralized system is implemented, sullage needs to be collected through the drains and disposed off. It is therefore proposed that sullage collection shall continue to be done through the existing drains with the provision for rehabilitation of drains in areas where they do not function properly and with treatment facilities at several locations around the city where the topography permits gravity flows. Such arrangement is suggested as an interim arrangement till the appropriate sewerage system is in place. Once such sewerage system in place, the sullage shall be combined with the sewage and transported through the sewerage system.

5.4.1 Parameters for selection of suitable options

While drafting effective solutions for solid and liquid waste management, numerous factors were considered in context of city which directly or indirectly might affect the selected option. The factors broadly subsumed socio economic pattern, topography, soil conditions and subsoil strata, density pattern and urban sprawl, future volumes of waste generations, existing financial and institutional status of local governing body.

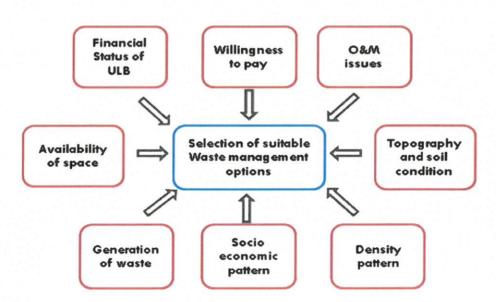


Figure 4: Factors influencing the choices of appropriate technologies for waste management

Currently, there are three types of toilet technology that exist in Baripada for excreta disposal; pit latrines and flush toilets with septic tanks and flush toilets connected directly to sewers. With the proposed extension of sewerage system or introducing more such systems under various schemes (JnNRUM etc) in coming few years, affordability, space availability, and availability of sewerage system shall continuously influence the choice of toilets for the households, particularly in slums in Balasore and as a result, a combination of these choices will always exist in the town.

High proportion of BPL households in the city may not opt for flush toilets with septic tank due to their low investment capacity and in many cases, a space constraint. The survey has indicated that majority of them prefer to have individual toilets provided subsidy is available. Few of them still prefer community toilets as they may not even afford to pay their contribution under any Government scheme/programme. Pit latrines are more suitable especially in dry areas (not suitable for water logging areas) and affordable for poorer families in the town where toilets with septic tanks may be preferred by middle and higher income group families.

5.5 Proposed options for Solid Waste Management

5.5.1 Processing of Biodegradable Waste

Various technology options are available for the treatment of municipal biodegradable waste. These are discussed below.

5.5.1.1 Vermicomposting

Vermicompost is the product or process of composting utilizing various species of worms, usually red wigglers, white worms, and earthworms to create a heterogeneous mixture of decomposing vegetable or food waste, bedding materials, and vermicast. Vermicast, similarly known as worm castings, worm humus or worm manure, is the end-product of the breakdown of organic matter by a species of earthworm.

Containing water-soluble nutrients, vermicompost is an excellent, nutrient-rich organic fertilizer and soil conditioner. The process of producing vermicompost is called vermicomposting.

Vermicomposting involves stabilization of organic solid waste through earthworm consumption which coverts organic material into worm castings. Vermicomposting is the result of combined activity of earthworms and microorganisms such as fungi, protozoa and actinomycetes that inhabit the gut of earthworms.

Earthworms consume various organic wastes and reduce the volume by 40–60%. Each earthworm weighs about 0.5 to 0.6 g, eats waste equivalent to its body weight and produces cast equivalent to about 50% of the waste it consumes in a day. These worm castings have been analyzed for chemical and biological properties. The moisture content of castings ranges between 32 and 66% and the pH is around 7.0

The earthworm species that are commonly considered are Pheritima, Eisenia and Peronyx species. They are known to survive in the moisture range of 20-80% and temperature range of 20-40 deg Celsius. Due to constraints of temperature, moisture, fermentable organic substances and heavy

metals, use of this method is recommended for specific mass of organic waste collected from household, eateries, gardens, housing colonies.

The commercial model

A commercial model for vermicomposting developed by ICRISAT, Delhi consists of four chambers enclosed by a wall (1.5 m width, 4.5 m length and 0.9 m height) (Fig. 2). The walls are made up of different materials such as normal bricks, hollow bricks, shabaz stones, asbestos sheets and locally available rocks. This model contains partition walls with small holes to facilitate easy movement of earthworms from one chamber to another. Providing an outlet at one corner of each chamber with a slight slope facilitates collection of excess water, which is reused later or used as earthworm leachate on crop. The four components of a tank are filled with plant residues one after another. The first chamber is filled layer by layer along with cow dung and then earthworms are released. Then the second chamber is filled layer by layer. Once the contents in the first chamber are processed the earthworms move to chamber 2, which is already filled and ready for earthworms. This facilitates harvesting of decomposed material from the first chamber and also saves labor for harvesting and introducing earthworms. This technology reduces labor cost and saves water as well as time.

5.5.1.2 Compost bins

This facility is used to compost the waste in container or large bins. The waste is filled in the compost bins and they are sprayed with microbes which fasten the rate of composting

5.5.1.3 Bio gas plant

This is a biological process that occurs in the absence of oxygen. Anaerobic processes can either occur naturally or in a controlled environment. The organic waste is put in an airtight container called a digester where decomposition begins and the biogas is captured and sold for electricity. The residue can be used as a fertilizer similar to compost. This option however requires careful operation and maintenance of the plant to run it successfully.

5.5.1.4 Windrows (Aerobic Microbial) Composting

This type of facility is where material is composted in long piles (windrows) on a flat site. Windrows are kept porous mechanically by turning the material periodically. If piles are not turned often enough, the center of the pile may not receive enough oxygen, producing strong, unpleasant odors.

This is best done at a minimum scale of one tractor-load or truck-load of waste, so that suitable high temperatures can be reached within the center of the heap which will kill germs, weed seeds and worm eggs. A load of waste is unloaded on the ground and sprayed with water. This heap is then pushed by blade-tractor or front-end loader into a higher heap, sprayed again, and heaped again (and again) to a heap of minimum 4 ft height (and maximum 10 ft height). Spraying should achieve a moisture content of about 40%, moist but not wet or waterlogged, so that air can enter the heap. To accelerate the process of composting dilute solution in water of cow-dung can be sprayed or compost starting bio-culture can be used (initially 2 kg per tonnes of waste and later 1 kg. Per tonne of waste).

In 4-10 days, the temperature within the heap will rise to 65-70 degrees C. Turn the heap with tractor-blade or front-end loader, so that the outer (cool) layer goes to the center of the new high heap and the hot inner material covers it. Then spray as before. By this time the volume of the heap is reduced to two-thirds, as water-vapour escapes and some carbon turns to carbon dioxide. After another 7-15 days, when temperatures rise, repeat the process to form a third heap (with 50% of original volume) and later a fourth heap of stabilized ready compost (with 33% of original volume) which will not decompose, generate any more heat or shrink further and can safely be applied to soil without fear of spreading disease or germs.

5.5.1.5 Mechanical Composting in machine

Mechanical composting is an aerobic composting that happens under the presence of oxygen. Wet waste from household and bulk generators consists of mainly cellulose which can be broken down by microbes into a soil like substance with manure like values, called compost. These microbes can multiply and increase rate of composting if provided with right temperature, moisture, and enough oxygen to multiply. This process can handle the mixed waste in any form and quantity. This option is suitable for large quantities of waste and may not be suitable for small towns.

5.5.1.6 Biomethanation (waste-to-energy) Process

The total solids in the organic waste decompose rapidly (i.e. is highly putrescible) and therefore these wastes can be treated by biomethanation process (more commonly called Anaerobic Digestion, AD) in more effective manner. In this method, the solid waste is treated in closed vessels where, in the absence of oxygen, microorganisms break down the organic matter into a stable residue, and generate a methane-rich biogas in the process. This biogas can then be used as a source of renewable energy to produce electricity. The solid residue which remains after biomethanation process comprises solid / fibrous material and liquid, which can be separated and rendered to meet local needs. The fiber represents an effective organic material, which can be sold as 'manure' or blended into organic compost.

The aqueous liquor is a nutrient-rich fertilizer, which can be used to recycle nutrients back to agricultural land. The treated water is then further treated using Diffused Aeration and Chlorine disinfection methods. Therefore, in this particular case, treated liquor discharge can be permitted to water sources.

This is a two-stage design. The sizes of the digesters for the first stage and the second stage are decided on the basis of the suspended organic contents of the slurry to be treated. This first stage fermentation is hydrolysis stage and the second methanation and polishing stage. The first stage is designed to give maximum solid retention time for the hydrolysis and the second stage is either proprietary modular UASB construction or specially developed hybrid design. Both stages operate in the Mesophillic range.

Area Requirement

Approximately 3 Acres of area is required to set up the plant. The digesters are totally covered and this being an anaerobic plant, there is no foul odor at the plant site.

The Advantages of Biomethanation Process

- · Combined treatment of sewage and solid wastes.
- Treated water conforms to river disposal norms laid down by PCB.
- Generation of a Renewable Energy sources in the form of Biogas
- · Environmental benefits
- · Reduced land requirement
- · Reduction in odor, vermin, etc
- · Reduced greenhouse gas emissions
- · Recycling of organic matter and nutrients
- Reduction in quantity requiring subsequent disposal, reuse potential of the remaining faction
- · Reduction of pathogens and weed seed in the waste applied to land

It is expected that about 100 TPD of organic solid waste will be bought at site for treatment. There will be a variation in this quantity during the monsoons.

Process Description of Biomethanation Plant

The proposed scheme includes the following sections:

- A. Segregated Organic Waste Handling Section
- B. Two Stage Anaerobic Reactors
- C. Manure Handling Section
- D. Biogas Collection and Scrubbing Section
- E. Power Generation Section
- F. Final Disposal of Treated Effluents

Aeration Section

Disinfection section

Power Generation Section:

It is suggested that for 100 TPD of biodegradable waste, one may install 1×0.50 KW Biogas Engine. Gas Engine use specially designed components to make the engine structurally much more robust than other conventional spark ignited engines. The combustion chamber components are designed to withstand high cylinder temperatures & peak pressures. This lowers the stress levels resulting in longer service life, high reliability & lower maintenance cost.

Special features and advantages:

- · Lowest running cost
- · Complete and particulate fee combustion
- · Low emissions
- · Longer service life
- · Non dilution of lube oil
- · Compact size
- · Easy paralleling
- · No fuel storage and handling
- · Extended lube oil and filter change period

The electricity generation potential from the expected production of 6000 cum/day of biogas is based on the methane content of 55-65% Calorific value of methane as 4800 k cal / m3 and the conventional efficiency of 35%. Taking these values into consideration the electricity generation from biogas is estimated as follows:

Energy Generation details

- 1. Biogas generation
 - i. Gas generated 6000 + 5% m3 / day
 - ii. Calorific value 5.75 kWh/m3
- 2. Power station: Electrical efficiency 35%
- 3. Energy generation power plant: Energy generated in the plant 12000 kWh/day + 5%
- 4. Auxiliary power requirement (@10 % of generation) = 1200 kWh/day
- 5. Net energy available for factory use 10800 kWh/day + 5%
- 6. Power plant installed capacity 500 KW

Biomethanation Details - NISARGRUNA BARC Model

The Principle

Biomass in any form is ideal for the Biomethanation concept, which is the central idea of the Nisargruna Biogas plants. BARC Mumbai based on thermophilic microorganisms and microbial processes develop the design of the biogas plant. The plant is completely gravity based.

Brief Process Description

The segregated wet garbage (food waste) is brought to the plant site in bins and containers. It is loaded on a sorting platform and residual plastic, metal; glass and other non-biodegradable items are further segregated. The waste is loaded into a Waste Crusher along with water, which is mounted on the platform. The food waste slurry mixed with hot water is directly charged into the Primary digester.

This digester serves mainly as hydrolysis cum acidification tank for the treatment of suspended solids. For breaking slag compressed air is used for agitation of slurry. Compressed air will also help in increasing aeration since bacteria involved in this tank are aerobic in nature. The tank is designed in such a way that after the system reaches equilibrium in initial 4-5 days, the fresh slurry entering the tank will displace equal amount of digested matter from top into the main digester tank.

Main digester tank serves as a methane fermentation tank and BOD reduction takes place here. The treated overflow from this digester is connected to the manure pits. This manure can be supplied to farmers at the rate of 4-5 Rs. per Kg. Alternatively municipal gardens and local gardens can be assured of regular manure from this biogas plant.

The biogas is collected in a dome (Gas holder) is a drum like structure, fabricated either of mild steel sheets or fibreglass reinforced plastic (FRP). It fits like a cap on the mouth of digester where it is submerged in the water and rests in the ledge, constructed inside the digester for this purpose. The drum collects gas, which is produced from the slurry inside the digester as it gets decomposed and rises upward, being lighter than air. 1" GI piping will be provided up to a distance of 50 m from the Biogas plant. Biogas burners will be provided. The biogas can be used for cooking, heating and can

be supplied through pipeline. Biogas is also used for electric power generation purpose. This power can be used in offices, houses or street lighting.

Cost details, saving and payback period from a Nisargruna biogas plant:

The cost details and the savings envisaged from the plant are given in the following table. The life of the plant could be 20-30 years and payback period is 4-5 years.

Capacit y (Tons / Day)	Install ation Cost (Rs In Lacks)	Monthly Operation and Maintenanc e Charges (Rs)	Methan e Genera tion M ³	production (tons /day)	Area Required M ²	Power	Manpower	Hot water (Ltr / day of 50-60 C°)	No. of tube lights for 12 hours	Cooking Fuel (Equivalent to LPG Cyl / day)
1	8-10	8,000/-	100- 120	0.1	300	5hp(2h r)	2	200	200	2-3 (5Kw)
2	10-12	12,000/-	200- 240	0.2	500	5hp(3h r)	3	400	400	4-5 (10Kw)
4	20-22	22,000/-	400- 480	0.3	700	5hp(3h r)	4	400	800	8-10 (20Kw)
5	25-28	30,000/-	500- 600	0.5	800	10hp (4hr)	5	600	1000	12-14 (25Kw)
10	65-70	50,000/-	1000- 1200	2.5	1200	15hp (4hr)	10	1000	2000	22-25 (50Kw)

For Dung Waste Methane Gas Generation 60-70 Cu M per Tone Dung Waste

Final Disposal of Rejects and Residues

Sanitary landfill is the only option that can be considered for disposal of rejects and residues and one that complies with the MSW Rules 2000.

^{*} This is an approximate cost for biogas generation plant and may increase by 10%–20%, depending on location, site-specific parameters, cost of materials, labour cost, etc., in different states/cities. Cost of additional infrastructure like office space, toilets, security, Godown, Shades and power generation will be extra, if required. Rs – rupees; m3 – cubic meters; m2 – square meters; h – hour; kL – kilolitre; LPG – liquefied petroleum gas; kW – kilowatt; cyl – cylinder

Chapter 6: Household Survey: Needs Assessment

AIILSG has conducted Household-wise consultations in Baripada to assess and understand the sanitation needs of households, their preferences for technology choices, willingness to pay or contribute for various technology options and their role in operation and maintenance of the sanitation facilities. This section presents the broad findings of these consultations, which have been used to develop and refine the technology options which are discussed earlier in the Technical Options Section.

Household surveys were conducted during April - June 2011.

6.1 Sanitation Needs

The major needs emerging from the assessment and consultations is provision of toilets for poorer families, solid waste dumping in open areas or in open drains, inadequate coverage of drains-improper construction of drains and resultant flooding in several areas of the city.

6.1.1 Household and Community Sanitation

There was sample survey of 864 numbers of households done by AIILSG team. Based on sample survey, it is estimated that only about 15 % families have access to toilets in the city. Those who have access to toilets in the city use either individual toilets or municipal public toilets/pay and use toilets. Remaining population is estimated to be defecating in open.

With respect to toilets, there is a latent demand for community toilets as individual toilets are not affordable to poorer families. As the numbers of



such families not having toilets are small and scattered, the construction of community toilets may not be feasible for them to address their sanitation needs, Secondly; the space is also a constraint for construction of community toilets in many of these areas due to congestion. Nobody knows about the scheme of ILCS and during survey AIILSG team nowhere found any toilet scheme in the city. There is a common perception among households that the toilets are expensive and require about Rs. 20,000-30,000 to build. Many of the households are not aware of the low cost toilets and there is a need to promote such toilets. In areas of water logging, toilets get flooded and effective storm water management is the only solution on water logging.

In few areas, water scarcity or non-availability of general water points in nearby locations have forced families to go out for open defecation despite having toilets with them. Households demanded water points to ensure sufficient water supply to them.

45

Overall, individual toilets are preferred by majority of the households. Open field defecation is preferred by poorer families and toilets with septic tanks are preferred by middle income group families. Around 5% of people are preferred public toilets, Pay & Use and Neighbour's toilets.

6.1.2 Sullage and Sewage Management

Overall, there was a strong feeling among most of the households consulted that the existing drainage system is not sufficient and not correctly designed to drain out wastewater. Dumping of solid waste in drains is also cited as a common problem for poor functioning of the drains. Immediate improvements in existing drains and additional drains were demanded in areas where water logging occurs. Households also raised issues of encroachments and illegal constructions along nallahs in the city thus blocking the natural flow. They suggested that appropriate legal measures are required to monitor and control such encroachments and illegal constructions.

Poorer families clearly indicated their inability to afford sewer connections for underground sewerage system. Middle income groups were ready to pay one time sewer connection amount of Rs. 1000. They also preferred underground sewerage system as they perceived that it would be bring more cleanliness in the area. Two major benefits they see are a) existing pit toilets smells and after connecting them to the underground sewerage will eliminate the smell around the pit toilet and b) cleaning of the filled pits will save cleaning costs which generally they have to pay every 3 years or so.

With respect to technology choice, low cost sewerage system was preferred by poorer as well as middle income group families due to constraints in paying higher connection charges that are required in conventional underground sewer system.

6.1.3 Solid Waste Management

The situation of the solid waste collection and disposal is poor in the city area. There are strong perceptions among households, and also visible in the city, that there are very few collection bins provided by the Municipality. Households' do not have options but to throw the waste in drains or open areas. House to House collection was preferred by most of the households across the city.



6.2 Willingness to Pay

Poorer families expressed their inability to contribute any cash as capital contribution in the new sanitation infrastructures such as community toilets, drains etc. They were willing to contribute labour for such works. They also expressed inability to pay for sewer connections. However, they were willing to pay up to Rs. 50 per month (22% of people) per services and total of say Rs. 100 per month towards sanitation tax for improved sanitation services. Middle income group families are willing to pay higher charges towards sanitation tax.

Chapter 7: Proposed Sanitation Improvements in Baripada

The proposed City Sanitation Improvements have been designed to address the issues and deficiencies identified earlier in improving the delivery of safe sanitation services which includes infrastructure (e.g. latrines, sewer, solid waste), associated hygiene behaviours, (e.g. toilet usage, segregation of waste, hand-washing etc), knowledge dissemination (low cost sanitation technologies, maintenance requirements etc) and a requisite enabling environment (e.g. institutional strengthening, public health regulations, fiscal incentive schemes for achieving sanitation outcomes). The improvements are designed based on the feedback obtained from the various stakeholders consulted in Baripada and their priorities. The improvements are proposed for the requirements of population for the next 5 years. Improvements suitable for the context of Baripada and cost effective in capital and maintenance costs have been identified and recommended.

7.1 Population Projections

Population Projections for Baripada for the next 10 years (up to the year 2021) have been made using Arithmetic Progression method as adopted by AIILSG. The projections are represented below.

Table 3: Population Projections for Cuttack

City	Baripada	Households
2001	95004	19001
2011	109769	22400
2012	113859	22772
2013	115748	23150
2014	117669	23534
2015	119621	23924
2016	121606	24321
2017	123624	24725
2018	125676	25135
2019	127761	25552
2020	129881	25976
2021	132037	26407

This Report for City Sanitation Plan argues that the Arithmetical Progression provides projections on lower side and such projections are suitable for the city where there are very low prospects for growth in near future. Other methods such as Graphical Method, Correlation Method give projections on higher side which are not matching with the growth prospects of the city and hence, their results have not been used. The arguments are acceptable and hence the results obtained by Arithmetic Progression Method have been considered to estimate future sanitation requirements for Baripada.

47

7.2 Future Requirements for Individual Toilets

While the city-wide open defecation is 21%, the Baripada slum survey indicated that only 15% slum households in Baripada have access to sanitation facilities for defecation. 85% residing in slums does not have access to any sanitation facilities. Though, these families might be covered under any programme such as the ILCS Programme, it is observed during the ward level assessments and consultations that there are families who do not have toilets, and may not be covered under any programme as many of them (the owner of the house) do not fall under BPL category (which is targeted by ILCS programme) or they are illegally occupying the land.

Overall, for projections to make the city open defecation-free by year 2015 at the maximum, it is assumed that 40% of households/population with constraints (such as extreme poverty, non-availability of land, unwilling to pay etc) for making a choice for individual toilets, shall have access to Community toilets.

In addition to the uncovered population, there would be new houses (especially *Kaccha*) coming up in the city especially in the newly developing areas; they may also require toilets. So despite the ILCS or similar other programme, there will be demand for more household level sanitation facilities. The projections include such an eventuality.

S* 24623 250; S* 24623 250; S* 24623 - 409 S 21 21 S 21 21 S 2171 86 S 2171 - 517 S 2171 - 517 S 2171 - 517			Lable	Table 4: Projected requirements of individual household toilets	quirements of	individual	household t	oilete				
S* 24623 25032 25447 S* 24623 25032 25447 S 21 21 21 21 S 2171 86 87 S 2171 87	Indicator	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021
S* 24623 25032 25447 S* 24623 25032 25447 S 21 21 21 21 S 2171 86 87 - 5171 86 87 - 5171 87 - 1120 1638	ttion	109769	113859	115748	117669	119621	121606	123624	175676	177771	120001	1202
S* 24623 25032 25447 - 409 415 5. 21 21 21 5. 3171 86 87 - 5171 87 - 5171 87 - 1120 1638	se in city tion		1859	1889	1921	1953	1985	2018	2051	2085	2120	2155
8 24623 25032 25447 - 409 415 5. 21 21 21 5.171 86 87 - 5171 86 87 - 5171 87 - 1120 1638	idual Toilets							-				
5. 21 21 21 5. 21 21 5. 21 21 5. 5171 86 87 5. 5171 86 87 - 5171 87 - 20% 30%	10. of Households*	24623	25032	25447	25869	26299	26735	27170	02920	00000	70554	00000
5. 21 21 21 21 21 21 21 21 21 21 21 21 21	e in no. of HHs	1	409	415	422	429	436	444	751	450	46687	87067
5171 86 87 5171 86 87 - 5171 87 - 20% 30%	ulation defecating 1 for increased no.	21	21	21	21	21	21	21	0	0	0 0	0
5 5171 86 87 - 5171 87 - 20% 30%	ted no. of HHs ing in open	5171	98	87	68	06	92	93	0	0	0	0
- 5171 87 - 20% 30% - 1120 1638	ted no. of HHs to ered under the ual toilet schemes	5171	98	87	68	06	92	93	0	0	0	0
- 20% 30% - 1120 1638	ted no. of toilet d (Assuming 1 squired for 1 old)***	1	5171	87	68	06	92	93	0	0	0	0
- 1120 1638	tage distribution r the backlog of D. of individual S171)	1	20%	30%	30%	20%	%0	%0	%0	%0	%0	%0
	ted no. of toilets d each year	•	1120	1638	1640	1124	92	93	0	0	0	0
123 127	No. of kaccha houses in newly developing areas (at 0.5% of total HHs)	123	125	127	129	131	134	136	138	140	143	145

2	2	%0	2	2
7	7	%0	7	7
7	2	%0	7	2
73	2	%0	2	2
71	-2	%0	2	95
7	2	%0	2	94
73	2	20%	27	1151
7	2	30%	39	1679
2	2	30%	39	1677
2	123	20%	27	1147
123	-	1		-
Increase in toilets for kaccha houses in newly developing areas	Increase in toilets for kaccha houses in newly developing areas	Percentage distribution to cover backlog of 60% O.D.	Estimated no. of toilets to be built by Government every year for new kuchchha houses****	Total individual toilets required each year

* Average HH size is 4.5 persons as per the information of households given by Baripada Municipality

** As per the information given by Baripada municipality, open defecation = 21%.

***All 100% of O.D. HHs covered under individual toilet schemes

****Same procedure has been followed for the new kuccha houses

				Table 5: Pro	jected Req	Table 5: Projected Requirements of Community Toilets	Community	v Toilets			
Indicator	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021
Population	109769	113859	115748	117669	119621	121606	123624	125676	127761	120881	132037
Additional increase in city population	,	1859	1889	1921	1953	1985	2018	2051	2085	2120	2155
Community Toilets											
% Population defecating in open (It is assumed that in 2011, no work to be done by Government)**	21	21	21	21	21	21	21			•	
Estimated no. of HHs defecating in open	23520	390	397	403	410	417	424	0	0	0	
Number of HHs to be covered under the community toilets	23520	390	397	403	410	417	424	1			
Total no. of Community toilet blocks required (It is assumed that the 1 seat for 60 persons and 8 seats in 1 block)	49	-	1	_	1	П	_			1	
Estimated no. of toilet blocks required	1	49	-	1	-	1	1				
Percentage distribution to cover backlog of 71% O.D. (80)		20%	30%	30%	20%	%0	%0	%0	%0	%0	
Estimated no. of Community toilet blocks required each year	ı	11	16	91	Ξ	-	-	0	0	0	

* Assume Open defecation may be same for next 5 years

51

**As per the Municipality, the O.D. is only 21%. So, we are assuming that all the cases happen in the slum areas therefore they all will be covered under the community toilet schemes

	Table	6 Summar	y of Project	cted Indivi	idual / Cor	Table 6 Summary of Projected Individual / Community Toilets	oilets				
Indicator	2011	2012	2013	2014	2014 2015	2016 2017	2017	2018	2019	2020	2021
Population	109769	113859	115748	117669	119621	113859 115748 117669 119621 121606 123624	123624	125676 127761	127761	129881	132037
Total no. of Households*	24623	25032	25447	25869	26299	26735 27179	27179	27630	28088	28554	28554 29027.99882
Total individual toilets required		1147	1677	1679	1151	94	95	2	2	2	2
Estimated no. of Community toilet blocks required each year		11	16	16	11	-	1	0	0	0	0
Total population to be covered under both the schemes (Individual toilets and Community toilets)		10827	15840 15854	15854	10869	988	901	=	11	12	12
Open Defecation (%)	21	11	0	0	0	0	0	0	0	0	0

7.3 Future Projections for Sewage Generation

Sewage flow is generally assumed as 80% of the total water supplied. The estimated sewage flows in Baripada for the projected population shall be as below.

Table 7: Future projections for generation of wastewater

Indicator	2011	2012	2013	2014	2015	2016	2017
Population	109769	113859	115748	117669	119621	121606	123624
Water Supply @ 135 lpcd (Mld)	15	15	16	16	16	16	17
Water Losses 15% (Mld)	2	2	2	2	2	2	3
Total Water Supply (Mld)	13	13	13	14	14	14	19
Sewage Flow (80% of 135 lpcd) (Mld)	12	12	13	13	13	13	13

Currently the sewage is partially treated in septic tanks or pits and effluents largely discharged in drains and open areas. In future, with the increased quantity of sewage, discharging into open areas poses major threat in terms of contamination of water sources, spread of diseases and odour nuisance.

7.4 Septage Generation

7.4.1 Future Projections for Septage Generation and Management

Table 8: Estimation of Generation of Septage and Management

Indicator	2011	2012	2013	2014	2015	2016	2017
Population	109769	113859	115748	117669	119621	121606	123624
No. of Households	24623	25032	25447	25869	26299	26735	27179
% of households connect to sewer system (10% of total population)*	0	2503	5089	10348	13149	16041	19025
Households with Septic Tanks**	15562	17566	18937	21358	21786	22150	22518
Households with Soak Pits**	3501	3952	4261	4806	4902	4984	5067
No. of Septic Tanks to be cleaned every year (50% of total)	7781	8783	9468	10679	10893	11075	11259
No. of Soak Pits to be cleaned every year (25% of total)	875	988	1065	1201	1225	1246	1267
Total Tanks/Pits to be cleaned every year	8656	9771	10534	11880	12119	12321	12526
Septage Generation @ 2cum/septic tank or pit	17312	19542	21067	23761	24237	24642	25051
Daily Generation (for 300 days in a year)	58	65	70	79	81	82	84

7.5 Future Solid Waste Generation

With the current generation rate of 0.3kg/person, the quantum of solid waste will grow up to 42 Mt per day during the Sanitation Plan period of 2011-2025 as estimated below.

Table 9: Estimation of future generations of solid waste

Table 7. Estimation of facult generations of sond waste							Name and Address of the Address of t		
Indicator	2011	2012	2013	2014	2015	2016	2017	2021	2025
Population	109769	113859	115748	117669	119621	121606	123624	132037	141021
Solid Waste Generation (Mt)*	33	34	35	35	36	36	37	40	42
Biodegradable (Organic) Waste (60%)	20	20	21	- 21	22	22	22	_ 24	25

^{&#}x27;* Per capita generation @ 0.3kg/day as per the information by Municipality

7.5.1 Collection and Transportation

The existing collection and transportation facilities and infrastructure available with the Municipality have be substantially improved to increase the effectiveness and efficiency of the collection and transportation of the solid waste generated in the city. Adequate provision of bins along with the use of push carts is the critical in safe collection of the solid waste generated. Along with the collection of the solid waste, cleaning of the drains shall also have to be undertaken by the



Municipality to avoid blockages in drains.

All the garbage points are maintained properly & kept hygienic by sprinkling lime & bleaching powder after completion of cleaning. Baripada Municipality has only 38 push carts, 47 bins and some wheel barrows available. For safe disposal of liquid wastes, Baripada Municipality has not its own Sewerage Treatment Plant. Improvement of some of the public latrines has been taken up by Baripada Municipality.¹³

^{*}Rate of people access to toilet assomed to increased by 10% every year

^{**}The septic tanks and soak pits assumed be increased by 2% to 5% (CPHEEO guidelines)

¹³ As per the Baripada Municipality and Situation Analysis report by AIILSG

Table 10: Future requirements for Collection and Transportation

			s for Collection				
Indicator	2011	2012	2013	2014	2015	2016	2017
Population	109769	113859	115748	117669	119621	121606	123624
Households	24623	25032	25447	25869	26299	26735	27179
Solid Waste Generation (MT)*	33	34	35	35	36	36	37
Required Sweepers 1 Sweeper for 650-750 m of road length (assuming that road length will be remain same as 144.57 km)	-	207	207	207	207	207	207
No. of Litter Bins required (1 Bin for 500m distance)	-	289	289	289	289	289	289
No. of Push Carts required –Max of no of Sweeper or 1 for 175 HHs	-	143	145	148	150	153	155
No. of Containers required -1 Bin of 4 cum for 2000 persons	-	57	58	59	60	61	62
No. of Mini Waste collector (1 Mini Waste Collector for 7 MT of MSW)	-	5	5	5	5	5	5

7.5.2 Composting and Landfill

As the organic content of the solid waste in Baripada is high, composting of the organic matter and land-filling for the inert or non-biodegradable matter is suitable and recommended. Composting and engineering Landfill site shall be developed at the existing location where the solid waste is dumped.

7.5.3 Capacity and Land Requirement for Composting

Composting plant of 25 Mt per day (TPD) capacity would be required based on solid waste generated over the next 15 years in the city. The plant would need a small piece of land –about 0.252 ha of land which is available in Baripada. Composting would need a few equipments to manage the day to day processing of the plant.

Table 11: Details of Composting Site

Design period	15 Years (up to 2025)	
Ultimate Waste for Compost in 2025 in Mt	25	
Size of each windrow (2mx1mx0.75m) trapezoidal shape	6.25 cum	
Net Area of Windrow (2mx1m)	3 sq.m.	
Assumed waste density in compost	0.5 T/cum	
Waste handled in each windrow	3.12 MT	
No of windrows required (design life)	8	
Gross Area required for each windrow	10	

Total Area required for each day compost	80
Initial Compost Period in days	21
Total Area for Composting in sq. mt	1680
Area required for other facilities (tipping floor, processing and storage) in sq mt	840
Equipment, Plant and Machinery	
Tipper Tractor	5
Water Tanker (3000 lit)	2
Weigh Bridge (10Mt)	1

Source: CPHEEO

7.5.4 Design of Landfill

Non-biodegradable and non-recyclable material shall be land filled. An engineered land filling is recommended in compliance with the MSW Rules 2000. The land required for the estimated quantity of waste to be land filled for the next 15 years is about 0.59 Ha.

Table 12: Design of Landfill site

Design Period	15 years
Fraction of total waste to be land filled	30%
Total Waste to be land filled in design life	93075 Mt
Assumed Waste density in landfill	1 cum/t
Total Waste Volume	93075 cum
Volume of daily cover (10% of the above)	9307.5 cum
Volume of liner and cover system	11169 cum
Volume available due to settlement	9307.5 cum
Total Volume	20476.5 cum
Assume height of landfill	5 m
Area of landfill required	4095 sqm
Additional required (trapezoidal shape)-25%	1023.83 sqm
Area of landfill required	0.51 Ha
Add 15% for buffer	0.08 Ha
Total Area required for landfill	0.59 На

Source: CPHEEO

7.6 Drainage

Till such sewer system is in place, rehabilitation of existing drains and low cost treatment options at various suitable sites around the town are proposed for the collection and treatment of sullage. Improving drains is also crucial to address water logging problems in the town. The lengths of the drains to be rehabilitated are estimated as below. It is assumed that about 10% of the existing road lengths require rehabilitation.

The road length in Baripada is 144.57 km and combined pucca/kachha drain length is 142 km.

The city has open drainage system and total natural drainage length is about 1003 kms

Table 13: Future Requirements of Drainage Network

Indicator	2011	2012	2013	2014	2015	2016	2017
Existing Road Length (km)	144.57						
Rehabilitation of Drains reqd. (10%) km	14.457						
Proposed Drainage works							
Rehabilitation of existing drains km	T	-	1.45	5.78	10.12	13.01	14.46
Construction of new drainage network (Km)	<u>-</u>	-	14.46	57.83	101.20	130.11	144.57

As the drain cleaning is to be combined with the sweeping and collection operations of the solid waste, appropriate equipment for cleaning the drains need to be made available to the staff involved in drain cleaning.

7.7 Summary of the Proposed Sanitation Improvements

Indicators	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021
Proposed Works										2020	
Household Sanitation											
Individual Toilets	-	1147	1677	1679	1151	94	95	2	2	2	2
Community Toilet blocks (5 public toilets already available)		11	16	16	11	1	1	0	0	0	0
Drainage		1									
Rehabilitation of existing drains Kms	-	-	1.45	5.78	10.12	13.01	14.46				
Construction of new drainage network (Km)	-	-	14.46	57.83	101.20	130.11	144.57				
Sewerage										55 16-5	
Solid Waste Management											
Litter Bins Nos	-	-	-	-	289	-	-				

No. of Container	-	57	58	59	60	61	62		
Mini Waste Collector (7 Mt Capacity)	-				5				
Compost Plant (25 Mt capacity)					1				
Water Tanker (3000 lit)					2				
Weigh Bridge (10Mt)					1				
Engineering Landfill (93075 Mt capacity)					1				

7.8 Capital Cost Estimates

Following are the indicative costs for the proposed improvements in sanitation in Baripada. The estimates have been prepared using the indicative costs observed in other cities in India and in few cases, market rates have been used. The detailed designing and rate analysis would be required to arrive at fairly accurate costs of the improvements proposed.

Table 14: Summary of Cost Estimates

	Quantity	Cost Assumption	Amount (Rs)
Proposed Works			
Household Sanitation			The second secon
Community Toilet Blocks (Total 8 seats in 1 block)	88 Blocks	Rs.56000/block*	5280000=00
Drainage			
Rehabilitation of existing drains (Km)	14.6	Rs.300/RM*	4380000=00
Construction of new drainage network (Km)	144.57	Rs 800 /RM*	115656000=00
Sewerage			

As per OWSSB norms, new DPR for Baripada would approximately show total outlay @ Rs. 3500 per capita for a projected population in 2041 i.e 183504 and total cost = 183504*3500= Rs. 642264000.

Solid Waste Management			
Litter Bins No.	289	Rs.3000/Bin	867000=00
Containers No.	62	Rs.15000/Bin	930000=00
Mini Waste Collector (7 Mt Capacity)	5	Rs.4,50,000/-	2250000=00
Compost Plant (25 Mt capacity)	1	Rs.4,00,000/Mt	400000=00
Tipper Tractor	5	Rs.600,000/-	3000000=00
Water Tanker (3000 lit)	2	Rs.400,000/-	800000=00
Weigh Bridge (10Mt)	1	Rs.600,000/-	600000=00
Engineered Landfill	1		

Rs.140/Mt ^{\$}	24528000=00
	799057500=00
	Rs.140/Mt ^S

Chapter 8: Suggested Strategies and Phasing plan

Based on the assessment of various technical options in relation to city context, as well as the intensity of issues related to wastewater management, various strategies were chalked out which would consider the existing shortfalls in the service level as well as the future requirement pertaining to growth of the city population and urban areas. Thus the phasing plan was suggested for the city of Balasore.

8.1 Immediate Action Plan

The plan refers to achieve the immediate needs in the sanitation sector for household sanitation, wastewater management and solid waste management. The plan aims at immediate 2 years and can be taken up through pilot demonstrations for selected areas.

8.2 Short Term Action Plan

These strategies will be mainly addressing existing demand gap in the household sanitation facilities (and in turn issue of open defecation) for next two to three years and will provide recommendations.

8.3 Mid Term Action Plan

Midterm strategies are aiming at enhancement of efficiency level of infrastructure design as well as monitoring mechanism. It will address the issues like achieving maximum sanitation coverage, upgradation of existing designs for wastewater treatment and disposal mechanism.

8.4 Long Term Action Plan

Long term strategies mainly look for achieving demand based strategy for developing sanitation infrastructure in future years. Increased participation and involvement of private sector can be looked upon by developing incentive based models for the community driven facilities.

59

Figure 5: Phasing Plan

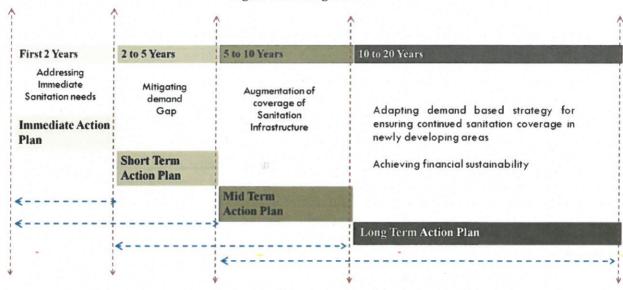


		Table 15: Phasing Plan		
Sector	Immediate Action Plan	Short term Action Plan	Mid Term Action Plan	Long term Action Plan
Household	Provision of Household toilets Ensuring effective implementation of becoming ILCS program	 Connecting toilets with small bore sewerage system Initiating new proposals under ILCS and implementation 	verage system and implementation	Ensuring household level sanitation facilities for newly emerging areas
Public Sanitation	Provision of 10 Public Toilets on Pay and Use basis in Market Areas	Connecting toilets with small bore sewerage system	Ensuring effective O & M throug	Ensuring effective O & M through involving Public Private Partnership
Wastewater management	Rehabilitation of existing drains	Improving coverage of drains in water logged areas Prohibitive measures to control encoachments and illegal constructions in natural streams/ nallas and on drains Explore private sector participation in wastewater management Adapting Recycling and Reuse mechanism for treated wastewater Increase Revenue generation by levying appropriate sanitation taxes	 Developing city wide network of drains covering 100% of length Connecting new developments with the existing network 	 Developing city wide network of drains covering 100% of road length Connecting new developments with the existing network
Solid waste management	 Provision of Adequate Waste collection bins Initiating Door to Door collection Improving Collection efficiency and Transportation 	 Initiate Segregation of waste at household level Explore private sector participation in Solid Waste management Developing composting plant Increase Revenue generation by levying appropriate sanitation taxes 	 Developing engineering Landfill site and composting plant Developing adequate infrastructure for Extend Solid Waste infrastructure in newly developing areas upgrade existing system of collection- transport and disposal Achieving zero waste management 	Developing engineering Landfill site and composting plant Developing adequate infrastructure for Extend Solid Waste infrastructure in newly developing areas and upgrade existing system of collection- transport and disposal Achieving zero waste management

Sec. 1

Chapter 9 : Awareness Strategy for Improving Sanitation Behaviour in Baripada

9.1 Objectives of the Awareness Strategy

The strategy will have objectives of a) establishing linkages of hygiene and sanitation behaviors and health impacts to improve knowledge and among general public for improved healthy living conditions' and b) developing mechanisms for collective action to bring about and sustain behavioral changes aimed at adoption of healthy sanitation practices.

9.2 Need for Specific Strategies

It is clear that the awareness strategy needs to address following specific hygiene behaviours that were observed during the household level survey carried out by AIILSG.

Table 16: Observations and expected Interventions

Observed Behaviours	Expected intervention or Hygiene Behavioural Change
Majority of the families allow their children to use open fields for open defecation	Children should be encouraged to use household level toilets for defecation
Infants excreta is thrown in open fields and drains	Infants excreta is equally harmful as of adults excreta and hence, it should be disposed off safely in toilets or pits where every disposed excreta needs to be covered with soil
Individual Toilets are not affordable	Models of low cost toilets to be promoted through awareness programme to provide wider choices to citizens on low cost toilets
Solid Waste is thrown in open fields or drains	Adequate community bins based on preferred locations to be provided, collection efficiency to be improved and awareness among citizens to be raised through campaigns on using the bins for disposal of their solid waste.
Kitchen liquid waste thrown in open fields	In house plumbing for effective of collection of kitchen waste and its disposal into the outside drains to be promoted. Where drains are not available, soak pits to be promoted. Awareness of citizens also needs to be raised on such connections and soak pits.

9.3 Targeted Audience

The awareness programme will target the following segments to promote the sanitation plan.

9.3.1 Population segments

- Youth (local and those among floating population) there is likelihood of gaining good participation
- School children awareness generation at early stage useful in long term
- Women they are involved in maintenance activities at residential level and also work in sanitation services
- People engaged in informal sector these are the ones who have least awareness
- Elected Representatives
- NGOs, Local Community Groups (SHGs, Youth Mandals, Hotel Associations, School Associations)
- Civil Societies
- Spatial segments
- Residential areas elite areas, slums, EWG housing areas, etc.

- Commercial areas, hotels, etc.
- Public places markets, bus stands, etc.
- Other hospitals, schools, government offices, religious places, Municipal Council Office etc.

9.4 The Proposed Awareness Strategy

The suggested Awareness (IEC) strategy has four major elements which are discussed below. The Task Force for City Sanitation Plan shall be involved in designing and delivering the awareness strategy in the city.

Engagement of a Media Agency and NGOs

The Municipal Council will engage an experienced Media Agency to develop print material (pamphlets, brochures, messages, pictures etc) and audio-visual as well other forms of raising awareness such as street plays, folk media etc. NGOs involvement would be useful to develop implementation strategies maximizing participation of citizens in the programme.

Development of IEC Material

The material should be developed based on the targeted behaviours, low cost technology options for toilets, sanitation facilities proposed including tariffs, and the demographic traits of local and floating population. Material developed should be tested among sections of citizens to assess its appropriateness prior to its printing.

Developing Outreach Strategy

Multiple strategies for reaching floating population as well local population have to be developed to ensure continuity and to increase its effective in terms of reach as well costs with participation of other relevant partners and stakeholders.

Inter-sectoral Collaborations: Municipality needs to explore inter-sectoral collaborations with other departments such as OJP, PWD, OWSSB, Health Department, Education Department and Department for Information and Publicity. Such collaborations could be in a form of sharing of resources (funds, material, staff etc) and integrating some of the awareness strategies in their programmes. For example, education department can take up special programmes for schools using their own resources.

Private Sector Participation: The Municipality can also explore participation of private partners in the awareness programme. The involvement of private partners could be beyond awareness programme also in the form of sponsorship, sharing of costs (fully or partially) for various events organized in the city and IEC material development etc, funding infrastructures/maintenance etc.

Launch of the Awareness Campaign: This activity need not to wait for the above two activities to complete. But initial planning would help participation of other departments and potential private sector players in such launch campaign. Awareness Campaign shall be launched through a formal programme of all stakeholders and representatives. Hoardings of this launch initiative shall be displayed at public places – preferably at bus stands, hospitals, theatres, colleges, near traffic squares,

Municipality building it, etc. This is to be done only to announce about the initiative – this is not meant for mass awareness about the schemes or IEC contents itself.

Community Mobilization: This is an important and critical activity which will help reach the grass-root sections of the community and will help motivate and trigger initiative at the individual, group or community level. Such community mobilization is recommended for slum areas and among population who is resorting to open defecation. Mobilization could be done through intensive and continuous interactions with the targeted population. Through mobilization, issues such as high cost of toilets, segregation of waste etc can be effectively handled through comprehensive discussions and demonstrations on low cost toilet models, financing mechanisms available, availability of masons, and technical advice and supervision available from the Municipality. Community mobilisation activities could be led by concerned Councillors to ensure that there is adequate political support for the awareness campaign.

9.5 Time Frame for Implementation of Awareness Strategy

Awareness Strategy is to be implemented intensively in a campaign mode during the first year involving a range of stakeholders in the city. In order to continue sustained efforts for behavioural change, activities which are effective shall be continued based on the outcomes of the activities of the first year.

9.6 Monitoring and Regulation

- Awareness campaigns and other activities help generate awareness but this would not necessarily result into practices and expected behavioral change. The Awareness has to be backed up with
- Resources in case of demand for any particular resources by communities (e.g. collection bins in areas where they do not available now),
- Motivation where change is happening and needs to be further supported with incentives for replicating it across other sections of community,
- Regulation where change is not happening and change can be brought about by legal actions.
- In order to decide on the support required to further the behavioral change, it is necessary that
 the awareness programme is monitored closely. Based on this monitoring, the strategies could
 be continued or modified.

Chapter 10: Implementation and O&M Strategy

The Baripada Municipality is responsible for implementation and operation and maintenance of all public sanitation, sewerage and solid waste management facilities that exist and proposed in this plan in the city area. The Municipality has been able to introduce innovative practice for maintaining public toilets involving private sector. However, there is a need to improve the performance of the services substantially in disposal of liquid waste and solid waste management. There is also a need to strategise maintenance to ensure that the facilities are operated and used on sustainable basis. Further strengthening of the Municipality in terms of improving work efficiency, additional facilities and equipment are needed to improve services in sanitation.

Capacity building shall be an integral part of the implementation strategy to enhance the knowledge of the staff/personnel involved from the Municipality for ensuring technically sound execution of the works, understanding maintenance requirements and improving their work efficiency.

10.1 Awareness Strategies for Baripada

As behavioral change is a gradual process and therefore, intensive but sustained efforts are needed not only for raising awareness to address socio-cultural biases against sanitation and the impact of environmental sanitation on public health, but also to inculcate practice among public to ensure sanitary conditions prevail in the city.

It is also important that the awareness strategy promotes the proposed City Sanitation Plan to seek participation of citizens of the city. The communication with citizens / community and within ULB should be transparent which would help to develop initiative at various levels.

10.1.1 Household and Public Sanitation

If any schemes come for the individual, community or public toilets then implementation of household level toilets shall be the responsibility of the Municipality. The construction of these toilets is being contracted out to local agencies. The Municipality's responsibility is to supervise the construction and ensure adequate funds flow for completing the works on schedule. Construction of modified pit latrines in water logging areas is critical area that requires special attention during the construction of the toilets in any Scheme.

Individual toilets will be constructed by households themselves but the Municipality needs to ensure that adequate technical and monitoring support – promoting low cost toilet models, licensing trained masons and ensuring technical supervision and advice to households, is mobilized.

Using the successful experience of existing public toilets being run by a private party (Sulabh Shouchalaya), similar mode of operations can be extended to the two public toilets in proposed in this plan. Constructing these toilets on BOOT basis may not be economically affordable to the users due to anticipated higher user fees which may discourage use of such toilets and hence, the Municipality can construct these and contract out its operation and maintenance.

<u>Institutional Requirement</u>: Currently, there are no technical staffs available with the Municipality to monitor the construction of toilets. It may be useful to engage an experienced technical person to ensure that adequate technical attention is paid to the modified toilets in water logging areas.

<u>Capacity Building requirement</u>: Training of local masons on low cost toilets and modified pit toilets in water logging areas is required. These masons may be from the construction agency or engaged directly by the Municipality.

Maintenance Arrangement: General experience with the public toilets is that user fees, if not designed appropriately, can act as deterrent to use the toilets. Families do not encourage children to use these toilets as user fees to be paid for the entire family become non-affordable. It is therefore advised that the user fees have to be charged for the entire family including children (and not for a single person), and to be charged on monthly basis. The maintenance costs have to be subsidised by the Municipality to bring down the user fees so that it becomes affordable especially for BPL families.

10.1.2 Drainage and Sullage Disposal Arrangements

These works can be contracted out for construction as routinely done through the Municipality.

<u>Institutional requirement</u>: Technical staff would be needed at the Municipality to supervise the works.

<u>Capacity Building requirement:</u> A training for the plumbing staff of the Municipality and the senior Technical staff (may be engaged on hire basis) on aspects of in-door sullage connections to the drains and technology options for the treatment and disposal of sullage is required.

Maintenance Arrangement: Cleaning of the drains should be combined with the sweeping and collection of solid waste management in the local area. A regular work schedule and responsibilities have to be chalked out by the Corporation for effective use of the available manpower (Sweepers).

10.1.3 Sewerage

Again, these works can be contracted out for construction as routinely done through the Municipality.

<u>Institutional requirement</u>: A technical staff would be needed from the Municipality to supervise the works.

<u>Capacity Building requirement:</u> A training for the plumbing staff of the Municipality and the senior Technical staff (may be engaged on hire basis) on aspects of sewer connections, sewer laying and maintenance, treatment and disposal arrangements is required.

<u>Maintenance Arrangement</u>: There are two options available for maintenance of sewerage network that may come up in a couple of years in Baripada: i) undertake maintenance internally ii) contract out maintenance services. The option one requires strengthening of the Municipality substantially in terms of staff and equipment especially for sewerage networks which may prove to be expensive and difficult to manage. The option ii) of contracting out services may be considered (as observed in cities where the maintenance is contracted out) and such contracts can be managed easily using limited staff within the Municipality.

10.1.4 Solid Waste Management

There are two options to execute and maintain SWM works viz. i) by engaging a contractor(s) and maintaining it through the municipality ii) by engaging a contractor on BOOT basis for implementation and maintenance.

The operation of the plant requires technical skills as well as enough resources to maintain for its sustainable operations. Composting plant can also generate revenue through the sale of compost but it requires additional management and marketing which may not be possible for the Municipality to do within the current institutional set-up.

There are examples available now where these works are executed and maintained through BOOT contracts. Such contract could cover collection, transportation and disposal of MSW. In such case, the current manpower can be handed over to the contractor. A tipping fee would be payable to the interested contractor which can be paid at mutually agreed time schedule.

The following comparison indicates that the integrated BOOT contract (combining collection, transportation, composting and landfill) proves to be cost effective to the Corporation. Such BOOT contracts can be engaged for a long term period of 15 years or so.

Table 17: Indicative O&M Cost estimation for Solid Waste Management

	Cost Maintenance Expenditure (Rs Lakhs)								
	Assumpt ion	2011	2012	2013	2014	2015	2016	2017	
Solid Waste Management									
Option I : In House Maintenance									
Collection, Transportatio n for Landfill	Rs.3200/MT*	-	13.12	13.33	13.56	13.78	14.01	14.24	
Option II: Maintenance through BOOT Contracts						•			
Collection, Transportatio n for Landfill *Odiska Govt. SoP	Rs.700/MT+	-	2.87	2.92	2.97	3.01	3.06	3.12	

^{*}Odisha Govt. SoR

<u>Institutional requirement</u>: A Technical staff would be needed from the Municipality to supervise the works. In case of BOOT contracts, external support of a consultant for development of BOOT contracts would be required.

<u>Capacity Building requirement:</u> A training for Municipality Officials, Staff and Elected representatives on importance of segregation of waste at source, composting and landfill processes and hazards, the economics of composting and marketing mechanisms, the maintenance requirements and the BOOT Contracts.

Maintenance Arrangement: There are several options available for maintenance of facilities and equipment created or to be created for solid waste management in the city. These are discussed below.

10.1.5 Collection and Transportation:

Option I: With the adequacy of staff and equipment except for more bins, collection and transportation can be effectively done through the existing institutional set-up. However, it needs planning, scheduling the work and effective leadership to guide the entire team of sweepers and other staff. This would be more cost effective as no new investments are required.

Option II: The other option is to contract out collection and transportation as it is being done in several small cities in India. The existing staff can be managed by the contractor and continued in such contracts. The advantage of such contract is that investments on transportation are generally done by the contractor thus reducing managerial hassles of maintaining own vehicles and reducing new investments on vehicles.

10.1.6 Composting and Land filling

Option I: With additional staff and equipment, the composting plant and landfill site can be operated and maintained. However, despite the availability of staff and equipment, the experience of maintaining especially composting plant in various municipalities is not encouraging primarily on account of poor technical knowledge to run such plants and absence of consistent attention and continuity in operation. Marketing of compost is another critical element and good amount of revenue can be lost if effective marketing is not in place.

Option II: Under the BOOT contract, the contractor can deploy his/her staff and equipment and operate and maintain the plant. The option has advantages that the contractor shall be accountable to the performance of the plant and shall also ensure that the compost is sold.

Option of Contracting O&M of the entire services

Under this option, an integrated contract can be developed for collection and transportation, setting up & O&M of composting plant and land-fill site. Such contracts are operational in a few medium size towns in India. Such integrated contracts are still not attractive to contractors but can be explored.

Recommended Maintenance Arrangement

In practice, as the economics of solid waste management is so attractive in Cities like Baripada and the contractors are easily available for investments, the following option is recommended.

- Continue collection and transportation in-house but improve the efficiency of the operations
- Maintain the Landfill site using in-house resources
- Contract out the maintenance and marketing of compost plant to the contractor using the BOOT method.

10.2 Sanitation Tariffs

10.2.1 Expected O & M Expenditure

Following are likely expenditures on the proposed sanitation facilities in the city estimated for next 10 years. The expenditures estimated below do not include depreciation charges for the hardware facilities.

Table 18: Estimation of O&M Expenditure

	Cost Assumption	Expenditure (Rs Lakhs)										
		2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021
Community Toilets (88 Blocks of 8 toilet seats each with 2 urinals)	Rs.8000/Toilet seat annually*	-	5.92	5.93	5.95	5.96	5.98	5.99	5.08	5.08	5.08	5.08
Sewerage System						Not	Conside	red				
Solid Waste Management												
Option I : In house Maintenance	Rs.3200/MT/ month*+	-	13.12	13.33	13.56	13.78	14.01	14.24				
Total		0.00	19.04	19.27	19.50	19.74	19.99	20.23	5.08	5.08	5.08	5.08

10.5.2 Present Taxes & Financial Scenario at Baripada Municipality

Details	2008-09 (Rs)	2009-10	2010-11
Taxes			
Holding Tax	16905809	21307896	2169010
Base Holding Rate (%)	10	10	10
Tax demand	3849641	46878832	4598565
Tax collection	2210735.5	2190956.9	2179442
Financial			
Revenue Income	91265380	46878832	173824464
Revenue Expenditure	109830142	73582845	181808441
Budget Income	422360000	25723100	278467200
Budget Expenditure	394255000	256248185	306247980

10.3 Proposed Measures for Revenue Improvement

The revenue situation with respect to maintenance of Sanitation facilities within the city area needs to be improved to meet the increasing expenditures on sanitation facilities in the city. This could be done using several strategies outlined below.

Identifying opportunities for revenues and tapping them. Some which are generating revenue through the sale of solid waste compost, treated effluent for irrigation and sludge from stabilisation ponds,

Reduce maintenance expenditure by promoting BOOT contract for solid waste management facilities. The expenditure can be cut down by almost 80% compared to in-house maintenance option.

Reviewing existing Sanitary Tax and upward revisions in them

Providing assistance for the preparation of Detailed Project Report (DPR) as per city sanitation plan as soon as requests for funding are received

Chapter 11: Implementation of CSP through Pilot demonstration and Immediate Action Plan

The sanitation infrastructure management strategies thus formulated for the city of Baripada in consultation with the Baripada Municipality officials and City Sanitation Task Force Committee as well as other stakeholders shall have to be followed by following activities as an extension of the city sanitation planning task so as to ensure effective implementation of the strategies.

The short term strategies can be very well considered and taken up for further elaboration through pilot implementation. It is recommended that each of the sectors discussed above should be considered for model implementation and for that any small area or community or ward can be taken up for detail study and model implementation in consultation with stakeholders.

Model implementation or implementation of pilot demonstration of projects can be initiated for the following sectors as a part of short term strategy.

11.1 Capacity building and awareness generation strategies

Developing an educated community well versed with the current issues and problems and able to mitigate the same is a vital need of any society in the present context and awareness generation strategies play an important role in it especially in the society having middle or lower economical class. After studying the current trends and practices related to sanitation in the city, such need was genuinely felt so as to bring reforms in it.

As a first step, it can be carried out by preparing a detailed methodology involving various NGOs working in the sector as well as by developing SHGs and participatory groups at mohalla or ward

level in order to take the program at grass root level. Various programs can be initiated with their help through schools and colleges, slums and LIG sectors.

11.2 Demonstration of Pilot project for installation of wastewater management plant

In order to achieve the safe disposal and treatment of the wastewater generated through the city. It is essential to develop collection-conveyance-treatment mechanism, which as of today, is totally lacking.

Initially it is recommended that based on the intensity of the issue certain areas should be prioritized and selected for installation of suitable wastewater treatment plant. A Detail Project Report (DPR) should be prepared which would subsume the detail survey of the suitable site and context by studying topography, micro level environment, and generation of waste, type of waste, expected design details, capital as well as O&M costs, human resource involved and other relevant details.

11.3 Initiating solid waste management for particular area/ maholla/ ward

The study showed that the city grossly lacks in the infrastructure needed for managing the solid waste generated across the city. There are insufficient bins at ward or Maholla levels or neighbourhood level to collect the waste generated at household level.

Lack of door to door managing the solid waste, collection is lacking in many areas affecting daily collection-transportation and disposal of waste.

Chapter 12: Way forward

The concept of implementation of CSP is suggested so as to ensure that the strategies and guidelines suggested through the document can be very well experimented on the site and will help involving community, NGOs as well as private players to take up initiative

A consultation workshop with stakeholders including citizens and government officials is recommended so as to develop a uniform understanding amongst them about the implementation of the pilot projects as an extension of CSP project for the city of Baripada. It will also help for understanding their perception and enlist the various projects based on their priorities and needs.

The financial plan will help for estimating and mobilizing the fund requirements while technical consultancy can be specifically worked out with detail scope of work for each of the project

12.1 Financial Planning

The financial plan will help for estimating and mobilizing the fund requirements while technical consultancy can be specifically worked out with detail scope of work (DPR) for each of the project component.

Chapter/Para 1.4 detailed earlier as Odisha Govt.'s Policies and financial outlay details State, Central Govt. and other external sources. Such current and forecasted finances, will contribute to CSP's proposed short-term and long-term financial projections.

Chapter 13: ANNEXURES

ANNEXURE - 1: ASSESSMENT OF SANITATION FACILITIES IN INSTITUTIONS IN BARIPADA

DURGA NURSING HOME

Durga Nursing Home is a private hospital; deals with all types of indoor and outdoor treatment. It is three storied building. Two doctors are available on a daily basis There are 40 rooms inside the hospital and 35 individual toilets. Toilets are connected with septic tanks. Condition of toilets is good. In a day, nearly 150 to 200 patients are being treated.

JEEBAN DEEP NURSING HOME

Jeeban Deep Nursing Home is a private hospital dealing with all type of indoor and outdoor treatment. It is a two storied building. 5 doctors are vailable on a daily basis. There are 10 wards and 10 toilets having two seats each. Toilets are connected with septic tanks. Condition of toilets is good. In a day, nearly 80 to 100 patients are being treated.

Sriram Chandra UP School

Sriram Chandra UP school has 150 students studying from 1st to 5th. The school has 7 rooms. There are two toilet each having one seat. The toilets are connected to septic tank. The solid waste generated is burnt in the campus..



Lalbazar UP School

There are 150 students studying from 1st to 5th. The school has two toilet having one seat each. The toilets are connected to septic tank, Solid waste is collected and burnt in the school campus.

Annexure – 2 Preferred Choices of Technologies and Willingness to Pay

	Γ	T	T ·
On Site Sanitation	Individual Toilets Septic Tanks Community Toilets	Poor knowledge on low cost models. Willing to construct. Funds Mobilization is a problem. Not Affordable Only labour contribution possible.	Cannot afford Rs.1000 as cash contribution under ILCS. Willing to contribute as labor. Only Select families may opt Option Not preferred
Off Site Sanitation	Low Cost Sewerage	Preferred provided connection charges are low.	
Options	Conventional Sewerage System	Not preferred on account of connection charges. Willing to pay for sewerage in the range of Rs30-50 per month	Low Cost Preferred. Willing to pay for sewerage in the range of 50-150 per month.
	Sewerage Connection	Cannot afford connection charges of Rs.1000.	Ready to pay Rs. 1000 as one time charges.
Solid Waste Management	House to House	A Ghanta Gadi is preferred	A Ghanta Gadi is preferred.
1 1 - 1 1 1 1 1 1	Collection	Willing to pay Rs 30 per month.	Willing to pay Rs. 30 or more per month



National Institute of Urban Affairs

Core 4B, 1 & 2 Floor, India Habitat Centre Lodhi Road, New Delhi - 110003, India Phone: 011-24617517, 24643284

Fax: 011-24617513

Websites: www.niua.org, www.indiaurbanportal.in